



CAMBRIDGE OAK™

COLORBODY™ PORCELAIN | TRUEDGE™ | REVEAL IMAGING®

RAGNO®

ARTFULLY REIMAGINED™



CAMBRIDGE OAK™

Cambridge Oak™ by Ragno requires a second look, probably even a touch, to be positive that it's not real wood. 36" length rectified to widths of both 6" and 9" combines with realistic surface graining and color shadings, compliments of Reveal Imaging®. The result is the beauty of prominent oak graining with all the benefits of porcelain and none of the maintenance headaches.

This ColorBody™ porcelain's eco-friendly characteristics of low life cycle costs, no VOCs, pre-consumer recycled material content and no-harsh-chemical maintenance meld perfectly with the warm, classic wood face of Cambridge Oak. Shades and veining differ from piece to piece, ensuring there's no cookie-cutter look. Instead a natural, variegated surface readily meshes with the preferred colors and building materials of today's residential and commercial customers.



COLORBODY™ PORCELAIN



Natural



Brown



Black

USAGE

Floors	Walls	Countertops
F	W	C

COLOR	9 x 36	6 x 36
Brown	AL6T	AL6Q
Black	AL6S	AL6P
Natural	AL6U	AL6R

SIZES

		THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
9 x 36 Floor Tile	(8-7/8" x 35-1/4") (22.50 cm x 89.50 cm)	3/8"	13.01	6
6 x 36 Floor Tile	(5-3/4" x 35-1/4") (14.70 cm x 89.50 cm)	3/8"	12.75	9

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit ragnousa.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

GROUT JOINT RECOMMENDATION	SHADE VARIATION
1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	V3 High Variation

PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	7.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: ragnousa.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: ragnousa.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to ragnousa.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



Floor Tile



Wall Tile



TruEdge™




Reveal Imaging®



Pre-Consumer Recycled Content



All or select items within this series meet the requirements for these qualifications. For more information visit ragnousa.com.

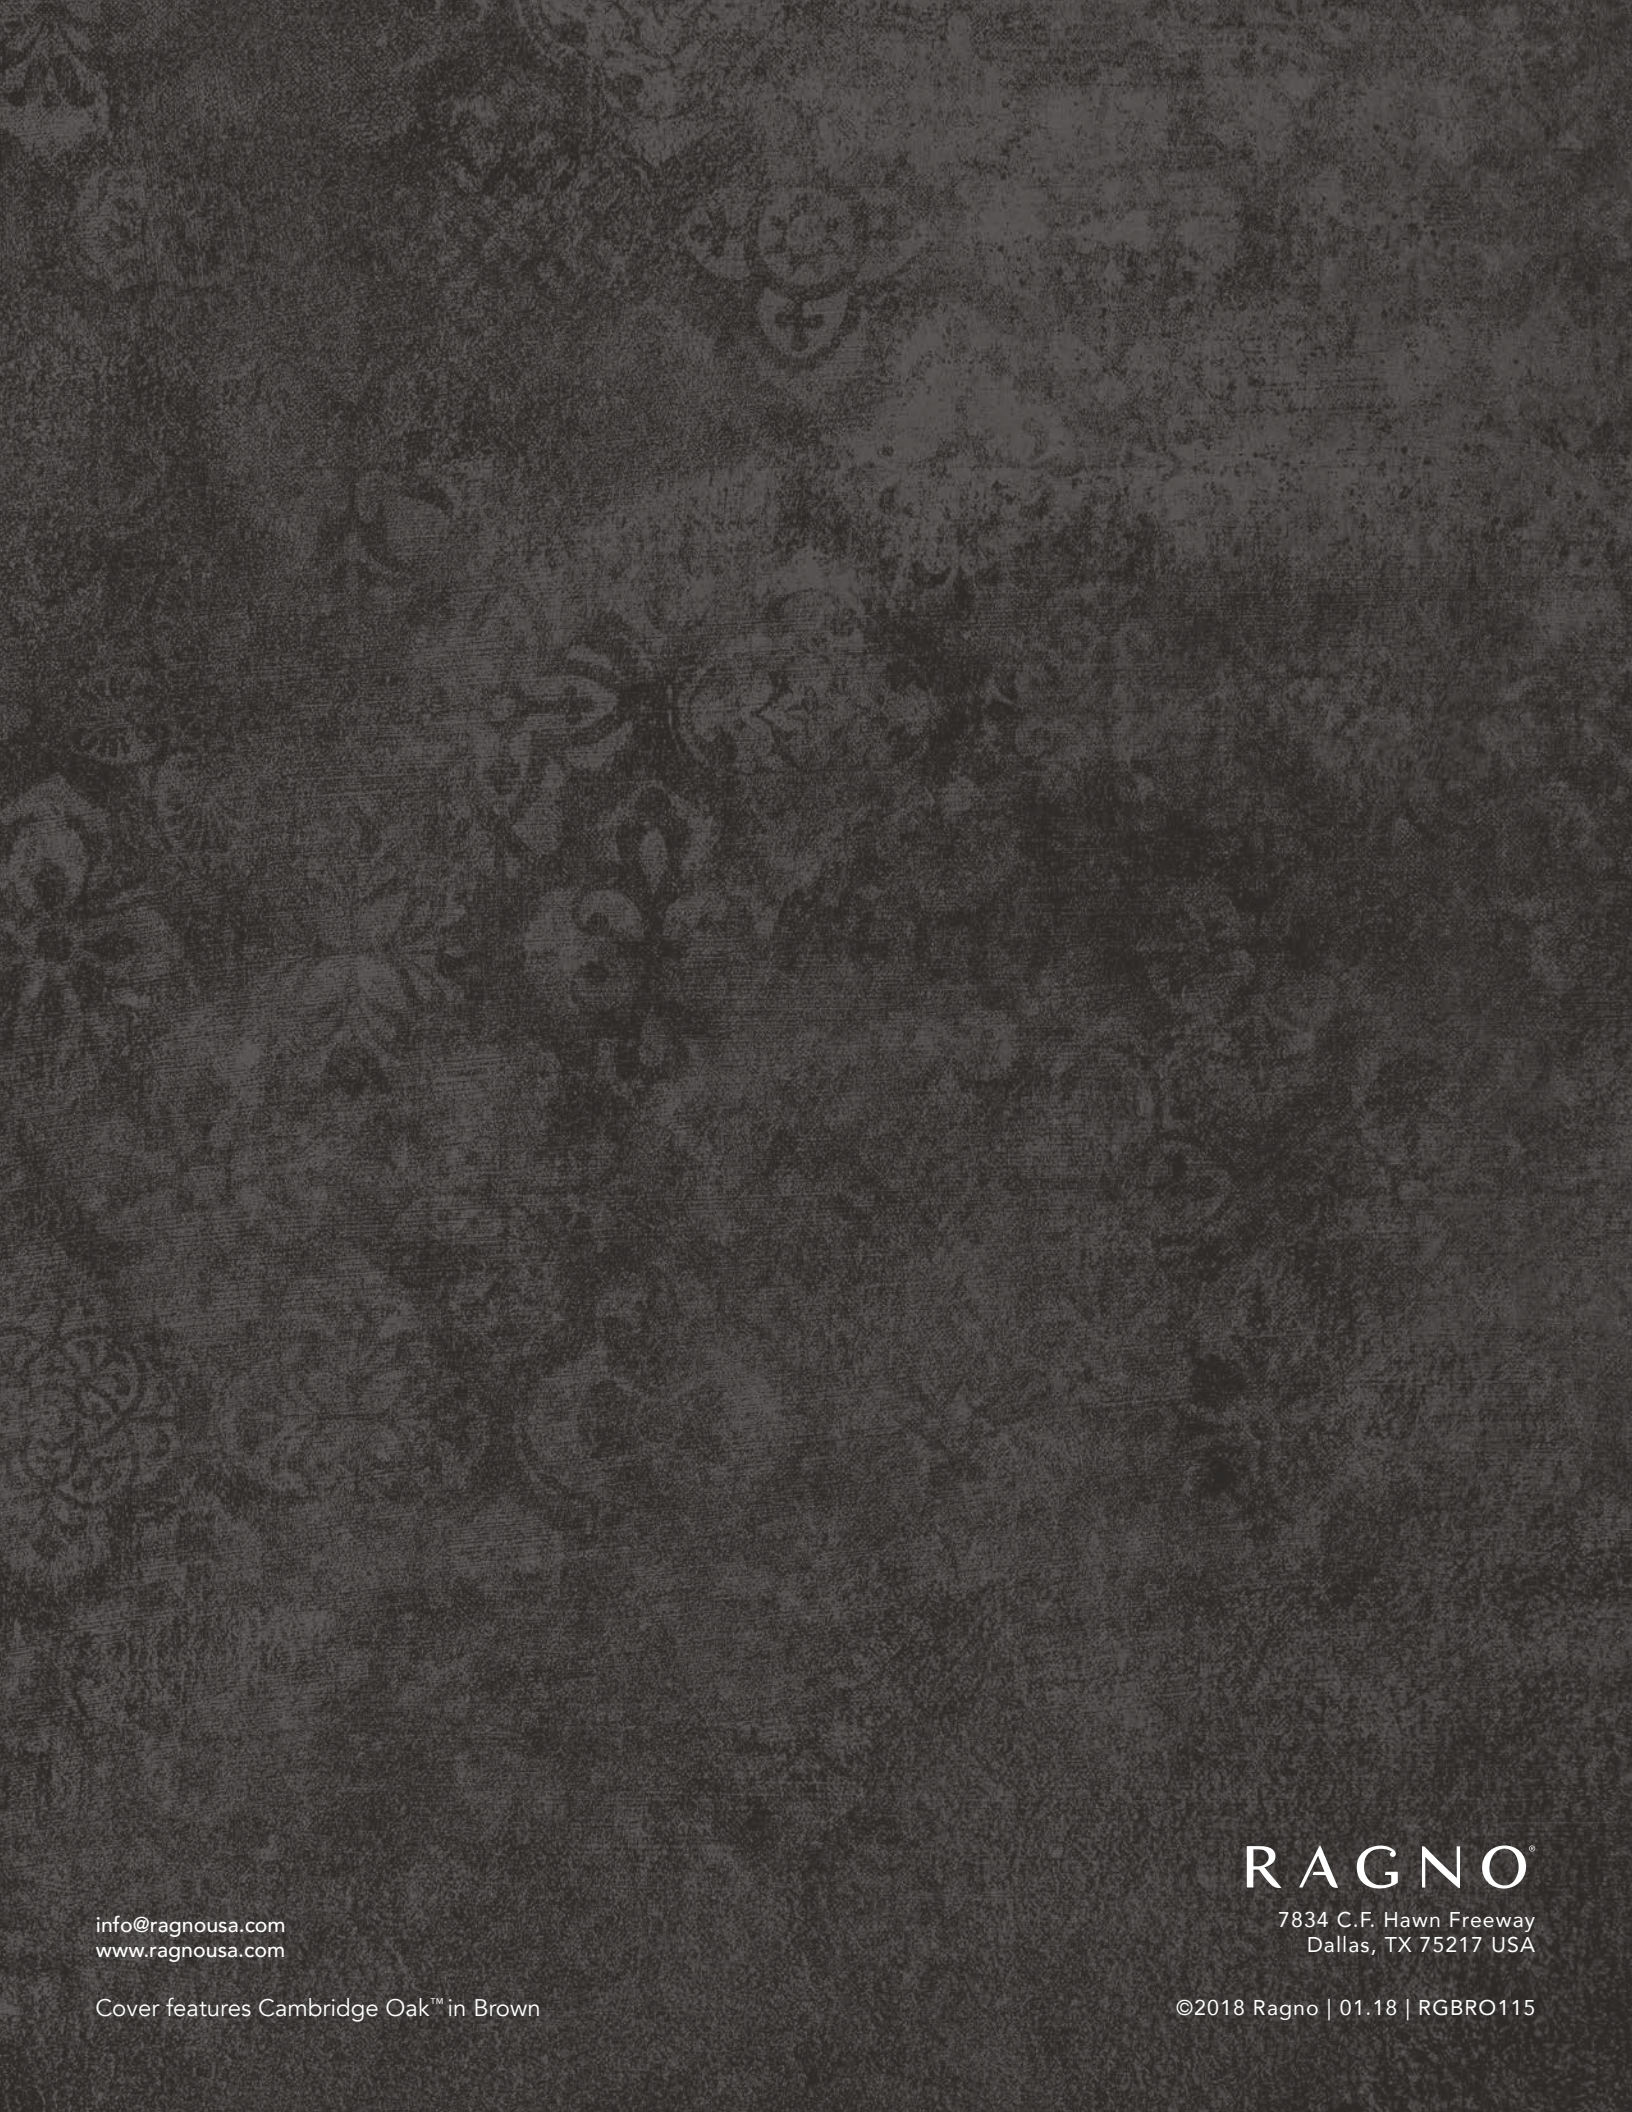

info@ragnousa.com
www.ragnousa.com

Cover features Cambridge Oak™ in Brown

RAGNO®

7834 C.F. Hawn Freeway
Dallas, TX 75217 USA

©2018 Ragno | 01.18 | RGBRO115