



CITYWIDE™

GLAZED PORCELAIN STONEWARE | REVEAL IMAGING®

RAGNO®

ARTFULLY REIMAGINED™



Photo features Citywide™ in Beige and Gray



CITYWIDE™

Contemporary porcelain is redefined with Citywide™, the perfect synthesis of Belgium's renowned natural stone in a modern concrete look. Softly structured, the large-format shapes – 12" x 24" and 20" x 20" – lend design flexibility to floors and walls in diverse environments. Cooler neutrals in off white, beige, brown and gray are versatile style elements, equally effective as subtle backgrounds or focal points for residential, hospitality, and commercial installations.





Photo features Citywide™ in Off White and Gray


GLAZED PORCELAIN STONEWARE



CT40 Off White



CT41 Beige

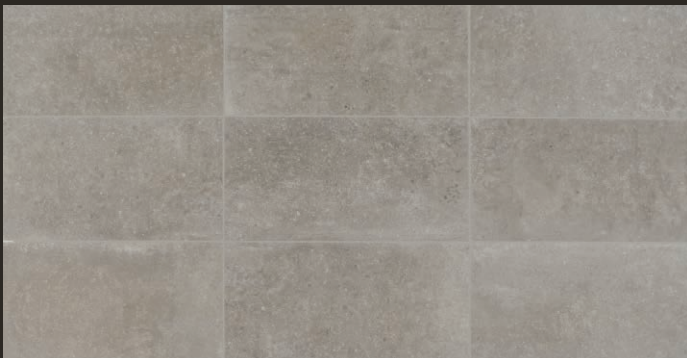

CT43 Gray



CT42 Brown


2 x 2 MOSAIC
 12 x 12 SHEET



CT40 Off White



CT41 Beige



CT43 Gray






CT42 Brown

USAGE

Floors	Walls	Countertops
F	W	C

SIZES

		THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON	
	20 x 20 Floor Tile	(19-11/16" x 19-11/16") (50 cm x 50 cm)	3/8"	18.83	7
	12 x 24 Floor Tile	(11-13/16" x 23-13/16") (30 cm x 60.48 cm)	5/16"	17.37	9
	2 x 2 Mosaic (Mesh-Mounted)	(12" x 12") (30.48 cm x 30.48 cm)	5/16"	10	10

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors (Residential or Light Commercial)	≥ 0.42	●*
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●*


A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit ragnousa.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.


* Mosaic tile only

TRIM

DESCRIPTION	NUMBER	SIZE	SHAPE
Floor Bullnose	P-43C9	3 x 12	

Floor bullnose trim is intended to coordinate with floor tile in the standard 90-degree installation position.

INSTALLATION

GROUT JOINT RECOMMENDATION	SHADE VARIATION
Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.) Mosaic: 1/8"	 High (V3)

PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR/MOSAIC RESULT
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	4

For additional information on test results, visit us at: ragnousa.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: ragnousa.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to ragnousa.com/LargeTiles for more information.

Use of a latex modified thin-set is recommended for installation. For more information visit, ragnousa.com.



Floor Tile



Wall Tile



Reveal Imaging™



Pre-Consumer
Recycled Content



All or select items within this series meet the requirements for these qualifications. For more information visit ragnousa.com.

info@ragnousa.com
www.ragnousa.com

Cover features Citywide™ in Off White and Gray

RAGNO®

7834 C.F. Hawn Freeway
Dallas, TX 75217 USA

©2017 Ragno | 06.17 | RGBRO108