

CONTIFLOW

A Fluid Flow of Expression





CONTI∞FLOW
A Fluid Flow of Expression



CONTI FLOW

A Fluid Flow of Expression


Conti-Flow perfectly encapsulates Niro Ceramic's innovative and creative proposition.

Both ingenious in concept and effortless in application, the collection showcases a pragmatic solution to practical installation issues while shining a different light into the versatility of smaller-format tiles and their artistic possibilities.

BIANCA GCN01

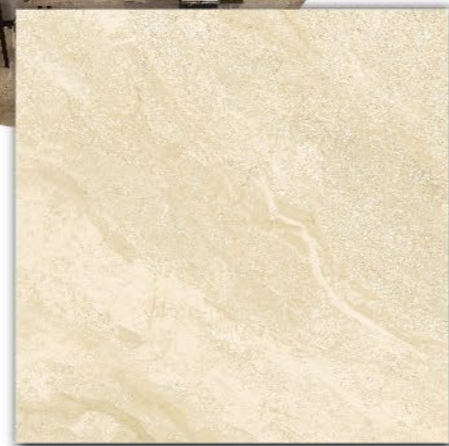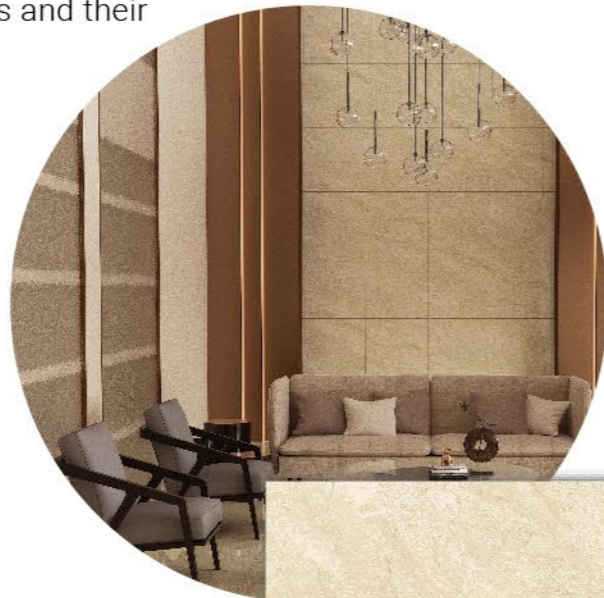


CREAMA GCN02

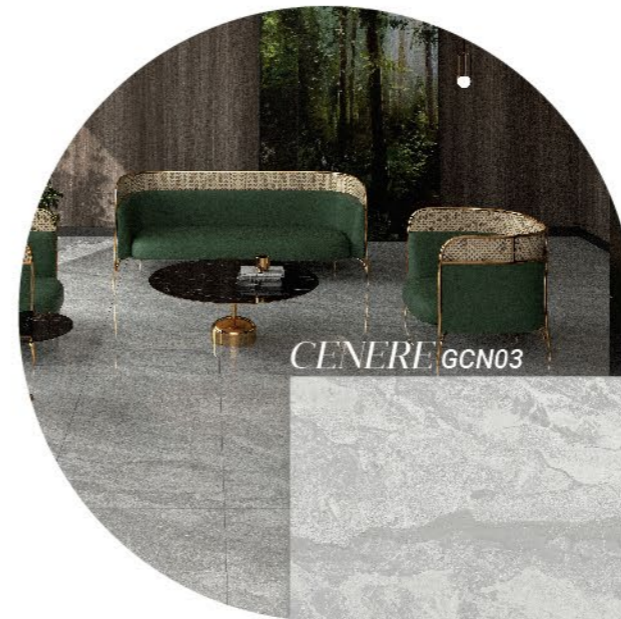

CENERE GCN03



GRIGIO GCN06

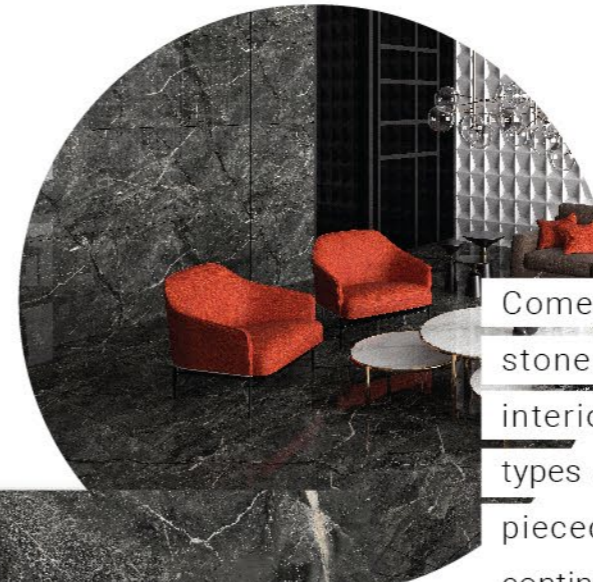


NERO GCN07

Come in a curated selection of marble and stone patterns that are dominating the current interior trend, every design comprises four types of tile flowing veins that can be seamlessly pieced together. The ambition is to create a continuous, fluid flow that is narrative resembling that of large-format stone slabs. Homeowners can thus easily create a new kind of interior landscape with Conti-Flow, experiencing the visceral excitement of full-format stone in all its glory.

GCN01
BIANCA

4 faces

01	02
03	04

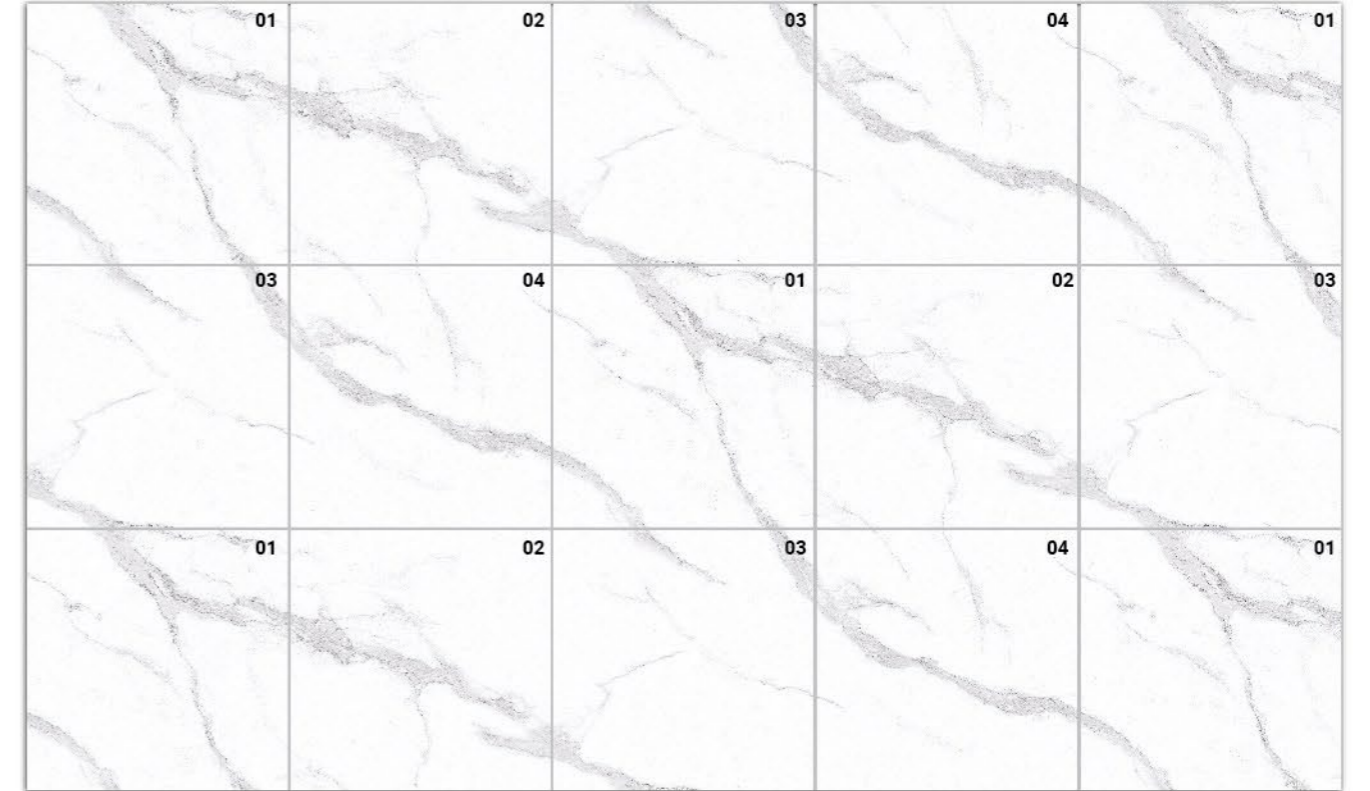

APPLICATION:


A. Wall

01	02	03	04	01	02	03
03	04	01	02	03	04	01
01	02	03	04	01	02	03
03	04	01	02	03	04	01

B. Wall & Floor

01	02	03	04	01	02	03
03	04	01	02	03	04	01
01	02	03	04	01	02	03
03	04	01	02	03	04	01

C. Floor

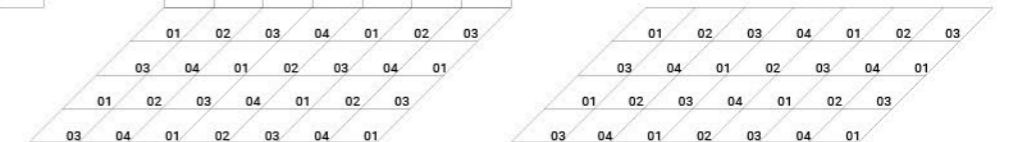

SIZE | SURFACE | THICKNESS | PACKING | WEIGHT | SHADE VARIATION |
80x80cm | polished | 11,0mm | 4pcs/ctn | 63kg/ctn | V2




GCN01 BIANCA • 80x80cm • polished

Versatility of
smaller-format tiles

GCN02
CREAMA

4 faces

01	02
03	04

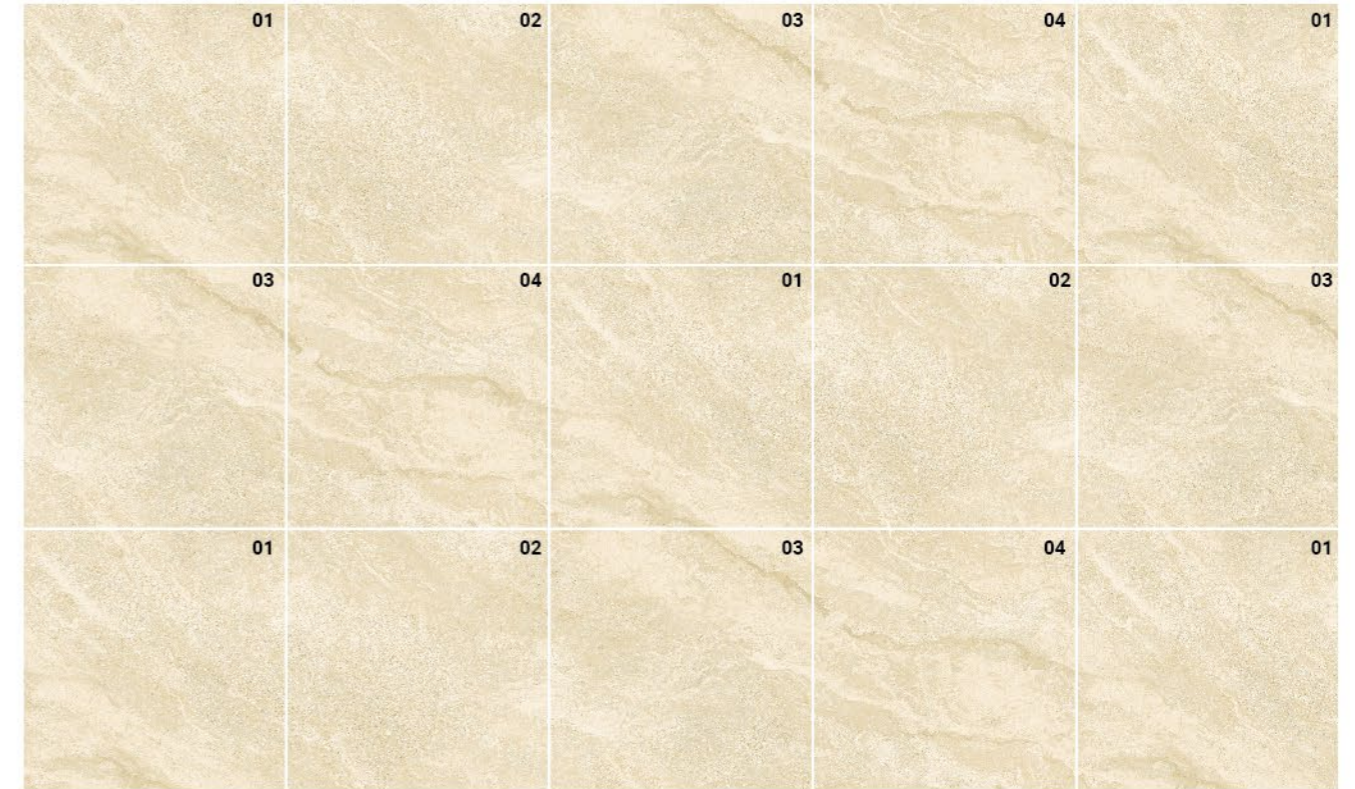

APPLICATION:


A. Wall

01	02	03	04	01	02	03
03	04	01	02	03	04	01
01	02	03	04	01	02	03
03	04	01	02	03	04	01

B. Wall & Floor

01	02	03	04	01	02	03
03	04	01	02	03	04	01
01	02	03	04	01	02	03
03	04	01	02	03	04	01

C. Floor

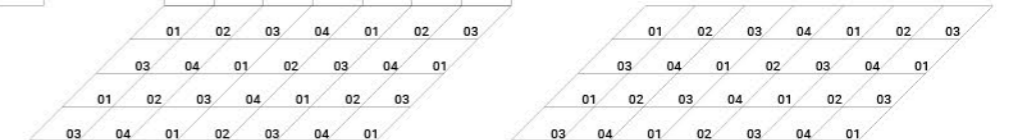

SIZE | 80x80cm SURFACE | polished THICKNESS | 11,0mm PACKING | 4pcs/ctn WEIGHT | 63kg/ctn SHADE VARIATION | V3



Versatility of it's
artistic
possibilities



GCN03
CENERE

4 faces

01	02
03	04

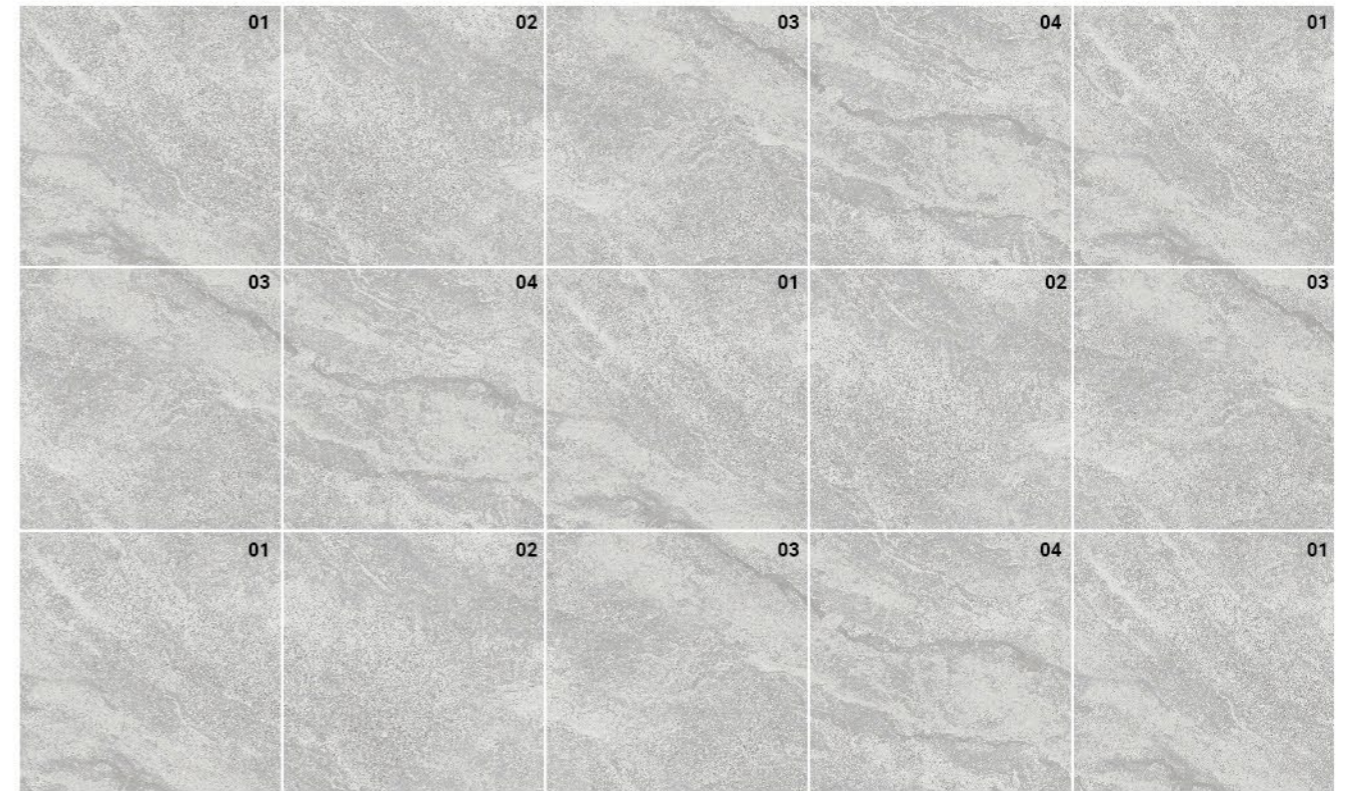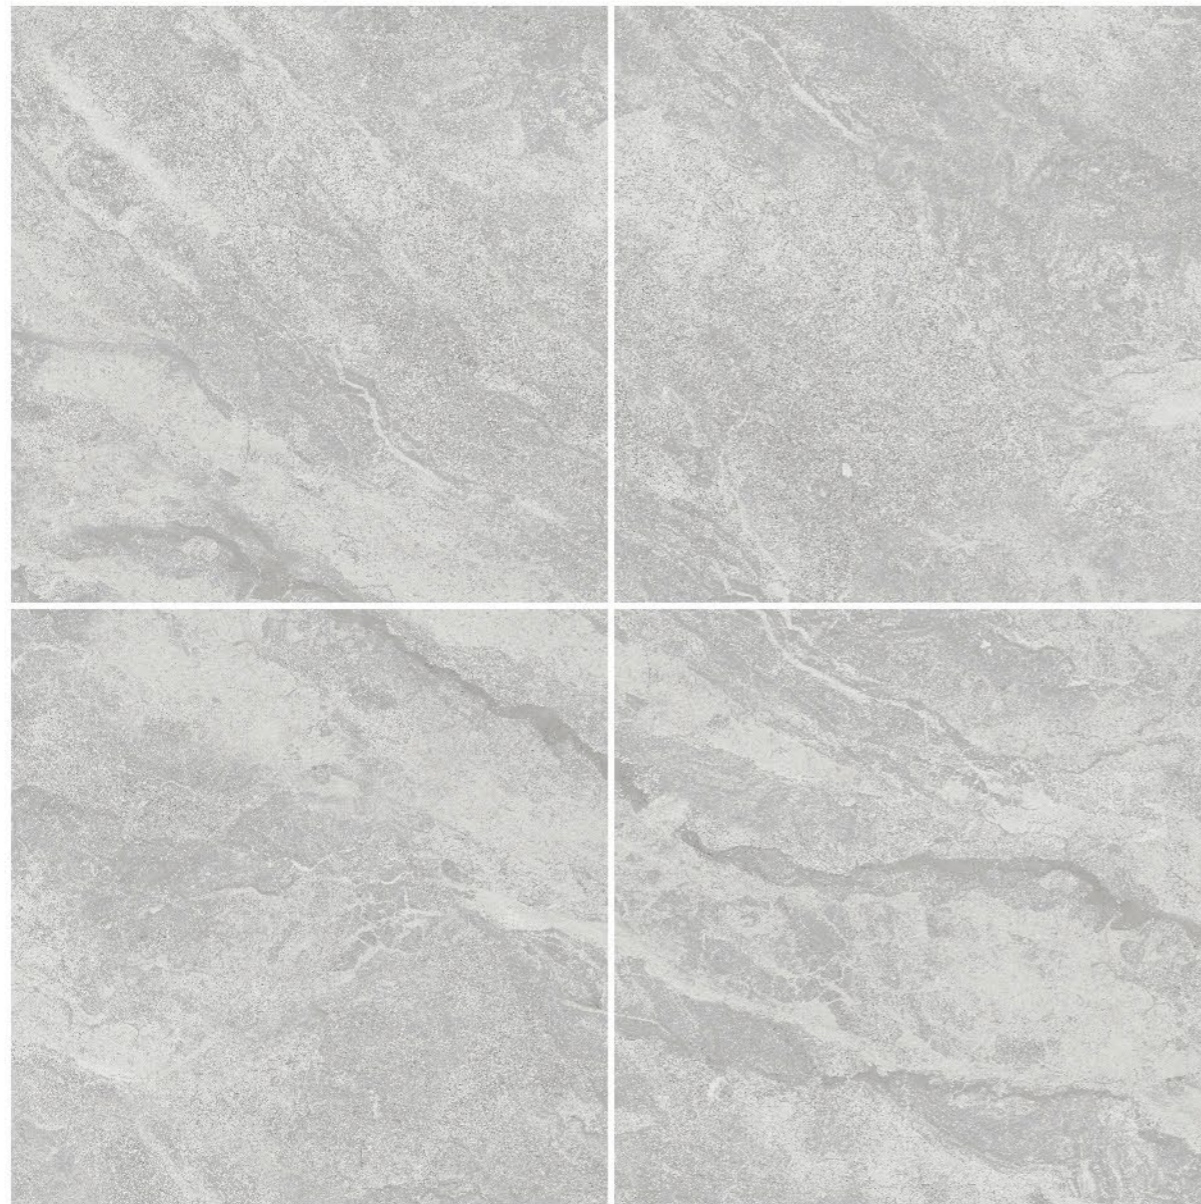

APPLICATION:


A. Wall

01	02	03	04	01	02	03
03	04	01	02	03	04	01
01	02	03	04	01	02	03
03	04	01	02	03	04	01

B. Wall & Floor

01	02	03	04	01	02	03
03	04	01	02	03	04	01
01	02	03	04	01	02	03
03	04	01	02	03	04	01

C. Floor

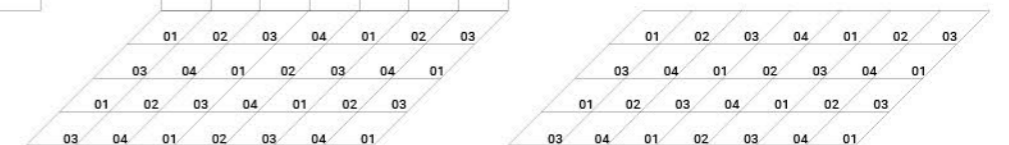

SIZE | 80x80cm SURFACE | polished THICKNESS | 11,0mm PACKING | 4pcs/ctn WEIGHT | 63kg/ctn SHADE VARIATION | V3



Fluid narrative
resembling that
of big slabs



GCN06
GRIGIO

4 faces

01	02
03	04

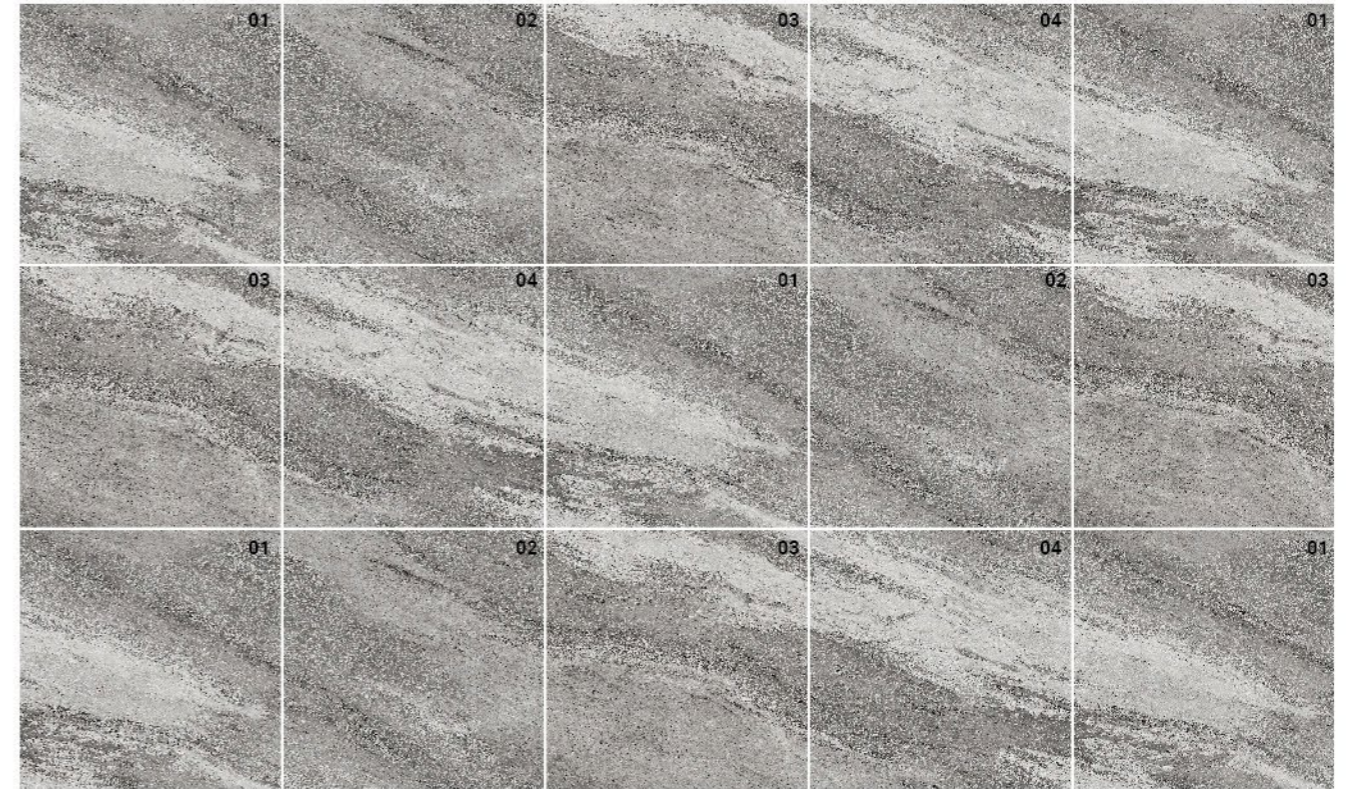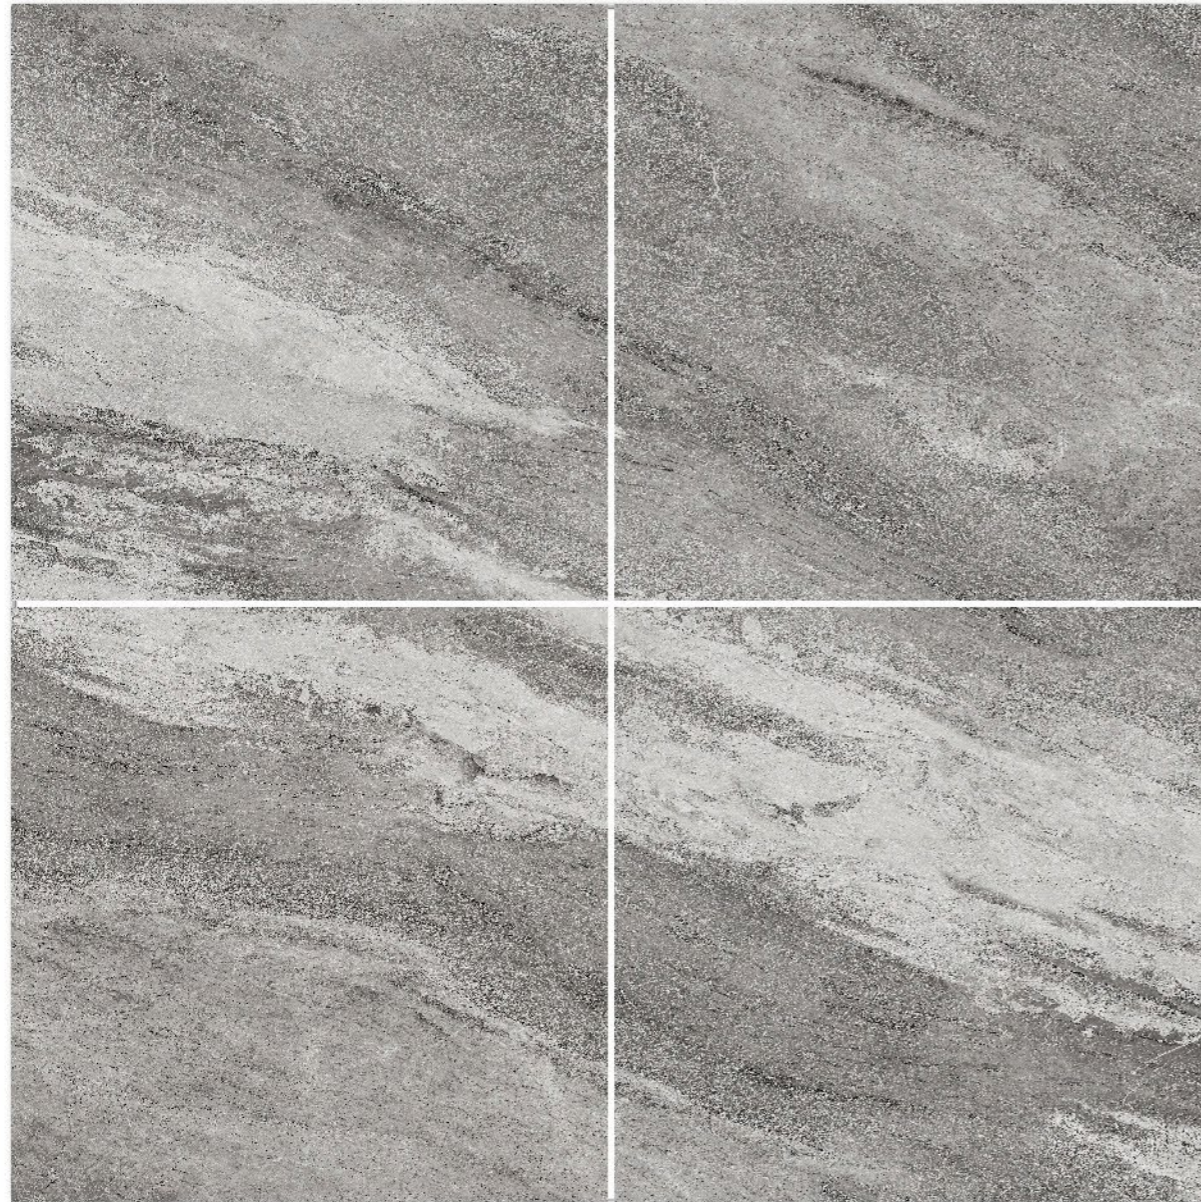

APPLICATION:


A. Wall

01	02	03	04	01	02	03
03	04	01	02	03	04	01
01	02	03	04	01	02	03
03	04	01	02	03	04	01

B. Wall & Floor

01	02	03	04	01	02	03
03	04	01	02	03	04	01
01	02	03	04	01	02	03
03	04	01	02	03	04	01

C. Floor

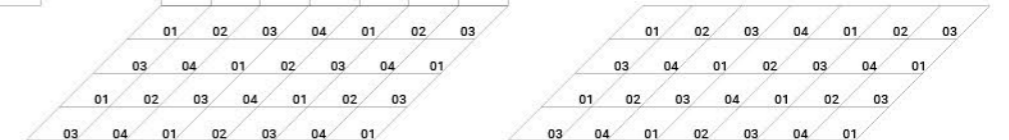

SIZE | SURFACE | THICKNESS | PACKING | WEIGHT | SHADE VARIATION |
80x80cm | polished | 11,0mm | 4pcs/ctn | 63kg/ctn | V3

Four types of veining



that can
be seamlessly
pieced together



GCN07
NERO

4 faces

01	02
03	04

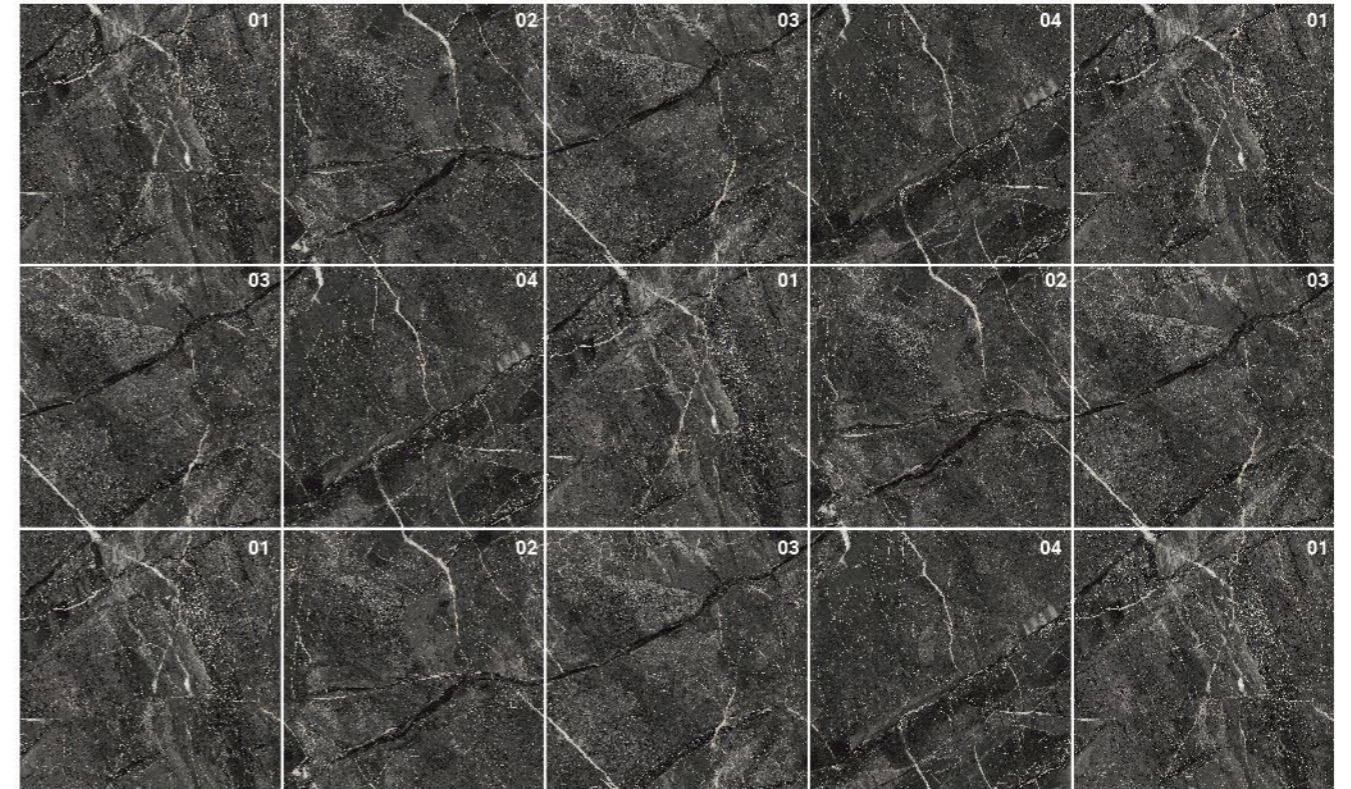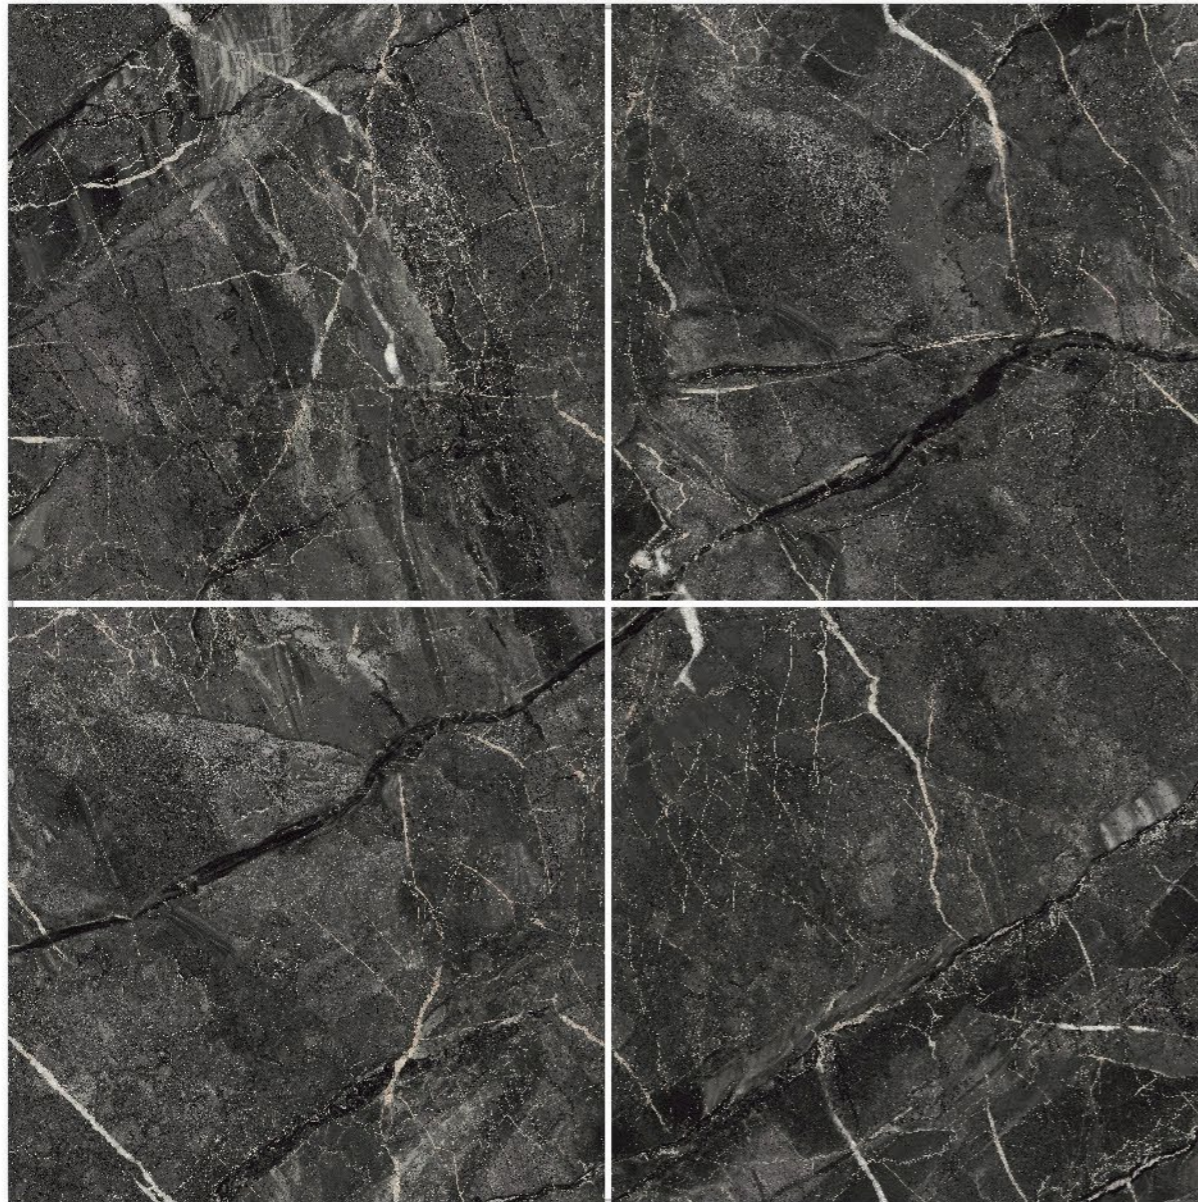

APPLICATION:

A. Wall

01	02	03	04	01	02	03
03	04	01	02	03	04	01
01	02	03	04	01	02	03
03	04	01	02	03	04	01

B. Wall & Floor

01	02	03	04	01	02	03
03	04	01	02	03	04	01
01	02	03	04	01	02	03
03	04	01	02	03	04	01
01	02	03	04	01	02	03
03	04	01	02	03	04	01

C. Floor

01	02	03	04	01	02	03
03	04	01	02	03	04	01
01	02	03	04	01	02	03
03	04	01	02	03	04	01

SIZE | SURFACE | THICKNESS | PACKING | WEIGHT | SHADE VARIATION |
80x80cm | polished | 11,0mm | 4pcs/ctn | 63kg/ctn | V3



Experiencing
the excitement of
full-format stone
in all its glory

TECHNICAL SPECIFICATIONS

DESCRIPTION	STANDARD TEST	MEASUREMENT UNIT	ISO STANDARD REQUIREMENT	NIRO GRANITE
Length & Width	ISO 10545 -2	mm	±0.6% Max	±0.30% Max
Thickness	ISO 10545 -2	mm	±5.0% Max	±5.0% Max
Sides Straightness	ISO 10545 -2	mm	±0.5% Max	±0.25% Max
Rectangularity	ISO 10545 -2	mm	±0.5% Max	±0.25% Max
Flatness: a) Centre Curvature	ISO 10545 -2	mm	±0.5% Max	±0.25% Max
b) Edge Curvature	ISO 10545 -2	mm	±0.5% Max	±0.25% Max
c) Warpage	ISO 10545 -2	mm	±0.5% Max	±0.25% Max
Surface Quality	ISO 10545 -2	One Major Area of Tiles	≥ 95% free from visible defect	Comply
Water Absorption	ISO 10545 -3	Mass	≤0.5%	≤0.25%
Breaking Strength	ISO 10545 -4	N	≥ 1300 N	≥ 1300 N
Modulus of Rupture	ISO 10545 -4	N/mm ²	≥ 35 N/mm ² Individual ≥ 32 N/mm ²	≥ 35 N/mm ² Individual ≥ 32 N/mm ²
Abrasion Resistance				
a) Deep Abrasion for unglazed tiles	ISO 10545 -6	mm ³	≤ 175 mm ³	≤ 160 mm ³
b) Surfaces Abrasion for glazed tiles	ISO 10545 -7	Visual Check	Manuf. to state abrasion class, cycle and passed	≥ PEI 3 (Dependent on product type)*
Crazing Test (glazed tiles)	ISO 10545 -11	Visual Check	No Sign of Crazing	No Sign of Crazing
Frost Resistance	ISO 10545 -12	Visual Check	Required	No Visible Crack
Chemical Resistance				
a) Low concentrations	ISO 10545 -13	Visual Check	Manuf. To State	Max visible change on cut side (Dependent on Product Type)*
b) Household chemicals and swimming pool salts	ISO 10545 -13	Visual Check	≥ Class B	≥ Class B
Stain Resistance				
a) For unglazed tiles	ISO 10545 -14	Visual Check	Manuf. to state	≥ Class 3
b) For glazed tiles	ISO 10545 -14	Visual Check	≥ Class 3	≥ Class 3
Coefficient of Friction (wet and dry) (Excluding Polished and Semi-polished tile)	AS/NZA 4586-2013 App.D.	Manuf. To State	Manuf. to State	Wet Pendulum ≥ P1 (Dependent on product type)*

* Refer to test report for specific test result.

Each different tiles series are produced to meet different performance requirements. For specific product technical performance, please request from Niro Granite sales team or their agent or distributor.

Colour Variations: Since the colour reproduction in this printed piece will vary from the actual tile colours, final selection should be made from tile samples. Colour, shade and glaze variations may exist due to the inherent characteristics of porcelain tile.



Due to the low porosity of porcelain tiles, an Improved High Performance Cementitious adhesive in accordance to BS EN 12004 & ISO 13007-1 is highly recommended for proper installation. Products that meet this standard are available amongst leading adhesive manufacturers. Please seek expert advice from adhesive manufacturers for proper selection and application.

CONTIFLOW

A Fluid Flow of Expression


NIRO CERAMIC GROUP

Lot 2, Persiaran Sultan,
Seksyen 15,
40200 Shah Alam,
Selangor, Malaysia.
T +603 5033 9333
F +603 5033 9323



www.nirogranite.com

 **facebook**
[/nirogranite.niroceramicgroup](https://www.facebook.com/nirogranite.niroceramicgroup)
[/CreativeLabbyNiroGranite](https://www.facebook.com/CreativeLabbyNiroGranite)

 **instagram**
[/Niro_Granite](https://www.instagram.com/Niro_Granite)

