































Accessories

	Description	inch	lbs	Qty.	Model-No.	USD
	Slotted waste Chrome	2"	0.7		005024 10 92	110
	Infobox: Slotted waste is required for installation					
	Slotted waste Chrome	2"	0.9		005038 10 92	110
	Infobox: Slotted waste is required for installation					
	Push-open waste *** Chrome	2"	0.8		005052 10 92	110
	Infobox: *** Required in combination with wall-mounted faucet, vanity unit and/or consoles					
	Pop-up basin waste Chrome with horizontal lever**	2"	1.1		005031 10 92	110
	Infobox: ** Required in combination with wall-mounted faucet and consoles with a maximum thickness of 1 1/8"					
	Pop-up basin waste Chrome with vertical lever***	2"	1.1		005051 10 92	110
	Infobox: *** In combination with wall-mounted faucet and Duravit bathroom furniture					
	Drain cover Chrome		0.2		005040 10 00	40
	Drain cover Chrome		0.2		005043 10 00	45
	Overflow clip Chrome				100107 00 00	20
	Outlet bend with double sleeve 1 1/8", Chrome				005025 10 00	30
	Fixing for stone countertops (with the exception of # 046651)		0.4		005028 00 00	35








Accessories

	Description	inch	lbs	Qty.	Model-No.	USD
	Fixing for stone countertops			0.04	005037 10 00	30
	Fixing for washbasins	ø 3/8" x 5 1/2"		0.4	695100 00 00	20
	Siphon for washbasin with outlet pipe 11 3/4" 11 3/4", Chrome	1 1/4"		1.3	005026 00 00	40
	Design Siphon * Chrome			3.3	005036 10 92	220
Infobox: * When using this siphon please observe outlet height from upper surface of finished floor to center of outlet in accordance with the technical specification sheet						
	Siphon for washbasin for washbowl Ciottolo, with elongated dip tube and outlet pipe Chrome	ø 1 1/4"		1.5	005054 00 00	95
	In-wall-siphon kit ** for washbasin Architec H70 including connection equipment			1.3	005044 10 00	45
Infobox: ** Mandatory for installation						
	Fixing for siphon cover			0.2	005503 00 00	40
	Fixing for siphon cover			0.2	005504 00 00	40
	Fixing for siphon cover			0.2	005505 00 00	40
	Fixing caps white caps Chrome	ø 1/4" x 2 3/8" ø 1/4" x 2 3/8"		0.2 0.2	006700 00 00 006700 10 00	30 30








Accessories

	Description	inch	lbs	Qty.	Model-No.	USD
	Mounting set for One-piece and Two-piece toilets					
	1/2", US-version		1.1		001431 00 00	110
Info : The mounting set is optional for installation						
	Mounting set for One-piece and Two-piece toilets					
	1/2", US-version		1.1		001417 00 00	110
Info : The mounting set is optional for installation						
	Vario connecting bend Ø 3 7/8", for vertical outlet					
			1.5		899025 00 06	115
	Vario connector set for horizontal and vertical outlet, length adjustable					
	incl. excenter		3.3		001422 00 00	110
	Noise reduction gasket for wall-mounted toilet					
			0.7		005020 00 00	95
	Fixing for wall-mounted bidet and wall-mounted toilet					
	caps white	Ø 1/2" x 7 1/8"	0.4		006500 00 00	50
Info : If pre-wall carrier not used, the fixing # 006500 is recommended						
	Siphon horizontal outlet (concealed)	Ø 2"				
			0.4		005112 00 00	55
	Fixing for urinal Ben, Jim, Bill					
	caps Chrome	Ø 3/8" x 5 1/2"	0.4		005030 10 00	20
	Fixing for urinal Dellarco, Duraplus, Utronic, Dry, Katja, 1930					
	caps Chrome	3/8" x 4 3/8"	0.2		006713 10 00	25
	Urinal screen Stainless steel					
			0.3		005042 10 00	45

Accessories

	Description	inch	lbs	Qty.	Model-No.	USD
	Siphon for bidet with extended outlet pipe Chrome	1 1/4" x 19 3/4"	1.3		005027 00 92	40
	Fixing hooks for # 084229, 045360, 079444, 075244		0.6		005000 00 00	35
Infobox: Requires fixing hooks #005000000 for installation						
	Fixing for floor standing bidet, floor standing toilet and siphon cover caps White and Chrome	Ø 1/4" x 2 3/4"	0.8		006701 10 00	25
	Tail piece adapter converts drains for use with U.S. p-traps	1 1/4" x 7 7/8"	0.3		005009 00 00	25
	Water inlet mechanism for urinals with back supply	1/2"	0.2		695800 00 00	80
	Flexible connecting hose for # 017009 Happy D.				999040 8	30
	Geberit carrier In-wall tank & carrier 2x6, for toilets width 19 3/4", depth 5 1/2" height (adjustable) 43" - 47"	19 3/4" x 5 1/2"	38.0		111335 00 5	635
	Sigma 01 flush plate, dual flush for toilets White	9 5/8" x 6 1/2"			115770 11 5	100
Infobox: For additional actuator options, please refer to page 307 - 308						
	Bolero flush plate, dual flush for urinals White				116012 11 1	340

Accessories

	Description	inch	lbs	Qty.	Model-No.	USD
	Tango flush plate, single flush for toilets					
	White	9 5/8" x 6 1/2"			115760 11 1	245
	Chrome	9 5/8" x 6 1/2"			115760 21 1	245
	Matt Chrome	9 5/8" x 6 1/2"			115760 46 1	245
	Bolero flush plate, dual flush for toilets					
	White	9 5/8" x 6 1/2"			115777 11 1	110
	Chrome	9 5/8" x 6 1/2"			115777 21 1	145
	Matt Chrome	9 5/8" x 6 1/2"			115777 46 1	145
	Pneumatic flush button, dual flush for toilets					
	White	4 1/4" x 4 1/4"			115942 11 1	190
	Chrome	4 1/4" x 4 1/4"			115942 KA 1	205
	Geberit in-wall tank with Dual Flush mechanism, for toilets					
	without flush plate				109304 00 5	490
	Geberit carrier For urinals				111625 00 1	685
	<div style="border: 1px solid black; padding: 2px;"> InfoBox: Geberit urinal carrier is required for installation </div>					
	Geberit carrier for toilets					
	In-wall tank & carrier 2x4				111728 00 1	710
	Pneumatic flush button, dual flush for # 111335005, 111255001 and 109304005					
	Chrome	3 1/8" x 3 1/8"			115999 21 1	165

SensoWash®

SensoWash® shower toilet seats

SensoWash® Starck	316
SensoWash® Starck C	317
SensoWash® Slim	320

SensoWash® suitable toilets

Darling New SensoWash® WCs	324
DuraStyle SensoWash® WCs	327
Happy D.2 SensoWash® WCs	330
ME by Starck SensoWash® WCs	331
P3 Comforts SensoWash® WCs	332
Starck 2 SensoWash® WCs	333
Starck 3 SensoWash® WCs	336

Accessories SensoWash®	341
------------------------	-----

SensoWash® Product Information

SensoWash® represents a new range of shower toilet seat with dedicated 'Rearwash' and 'Ladywash' functions.

Duravit provides SensoWash® in different comfort classes: SensoWash® Starck, SensoWash® Starck C and SensoWash® Slim.

SensoWash® Starck C and SensoWash® Slim ceramics conceal the connections supplying water and electricity.


This makes installation simple. There are three stages, pre-installation, toilet installation and the mounting of the shower toilet seat.

The functions themselves - from gentle cleansing to intelligent energy saving mode - offer maximum comfort with very easy operation, as all functions are remotely controlled.




SensoWash® overview


SensoWash® Slim



SensoWash® Starck C with concealed connections



SensoWash® Starck with visible connections



	SensoWash® Slim	SensoWash® Starck C with concealed connections	SensoWash® Starck with visible connections
Darling New	●	●	●
DuraStyle	●	●	-
Happy D.2	●	●	-
ME by Starck	●	-	-
P3 Comforts	●	-	-
Starck 2	●	●	●
Starck 3	●	●	●

SensoWash® Product Information

SensoWash® Slim

SensoWash® Slim shower toilet seat with concealed connections, suitable for series Darling New, DuraStyle, Happy D.2, ME by Starck, P3 Comforts, Starck 2 and Starck 3, Design by Duravit.




SensoWash® Starck C

SensoWash® Starck C shower toilet seat with concealed connections, available as SensoWash® Starck C (suitable for series Darling New, Starck 2 and Starck 3), SensoWash® DuraStyle (suitable for series DuraStyle) and SensoWash® Happy D.2 (suitable for series Happy D.2), Design by Philippe Starck.



SensoWash® Starck

SensoWash® Starck shower toilet seat with visible connections, suitable for series Darling New, Starck 2 and Starck 3, Design by Philippe Starck.

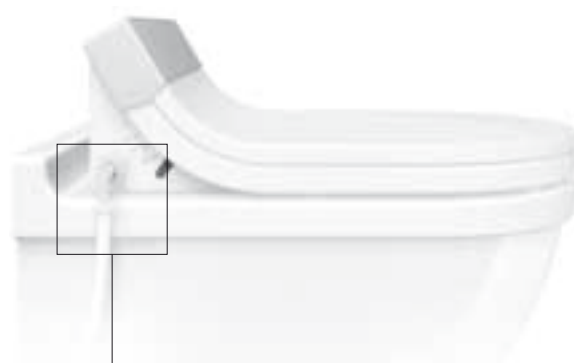

Visible connections for water and power supply.



SensoWash® Product Information

Functions operated by remote control

	<p>Rearwash Gentle and safe rear cleansing.</p>		<p>User profiles Personal preferences can be stored in different user profiles.</p>
	<p>Oscillating Comfortwash Forward and backward moving movement of spray wand during shower.</p>		<p>Electromotive actuated seat and lid Convenient opening of seat at the touch of a button.</p>
	<p>Pulsating massage jet Pulsating water jet as additional massage function.</p>		<p>Convenient opening of seat and lid at the touch of a button.</p>
	<p>Ladywash Spray wand function for feminine cleansing.</p>		<p>Convenient opening and closing of seat and lid at the touch of a button.</p>
	<p>Warm air dryer Pleasant drying through warm air after shower.</p>		<p>Warm air dryer temperature Individually adjustable temperature of warm air dryer.</p>
	<p>Spray wand position Spray wand position can be adjusted to individual preference.</p>		<p>Seat temperature Individually adjustable temperature of integrated seat heater.</p>
	<p>Water spray intensity Water spray intensity can be adjusted to individual preference.</p>		<p>Water temperature Water temperature of shower functions can be individually adjusted.</p>
	<p>Energy saving mode Individual setting for energy saving mode.</p>		<p>Increase / decrease function Adjustment of water spray intensity and temperature.</p>
	<p>Stop Rearwash, Ladywash, Comfortwash and warm air dryer functions stop immediately.</p>		

Additional functions

Automatic cleaning

Spray wand and nozzle are cleaned automatically before and after use.

Quick release

Seat unit for WC-cleansing easy and quickly removable.

Instant heater

Continuous supply of heated water during shower functions.

Seat sensor

User detection by an integrated sensor in the seat.

Spray nozzle

Spray nozzle detachable for cleaning and replacement.

Antimicrobial

Antimicrobial properties of seat and spray wand materials.

Night light

Illuminated inner bowl for night mode.

Remote control

Convenient and easy-to-use operating of shower toilet seat functions.

Automatic closure

Silent closing seat and lid.

Blocking function via remote control

No function can be used while this function is activated.

Seat and lid easy removable one-handed

Automatic drainage in periods of prolonged disuse

SensoWash® Product Information

	SensoWash® Slim	SensoWash® Starck C	SensoWash® Starck
Seat			
Silent closing seat and lid	●	●	●
Electromotive actuated seat and lid	-	●	●
Adjustable seat temperature	-	●	●
User detection	-	●	●
Concealed connections - water / power	●	●	-
Hygiene			
Automatic cleaning of spray wand and nozzle before and after use	●	●	●
Antimicrobial properties of seat and nozzle materials	●*	●	●
Spray nozzle detachable for cleaning	●	●	●
Complete unit removable for cleaning	●	●	●
Seat and lid easy removable one-handed	●	-	-
Automatic drainage in periods of prolonged disuse	●	-	-
Cleanse			
Rearwash	●	●	●
Ladywash	●	●	●
Oscillating Comfortwash	●	●	●
Pulsating massage jet	-	●	●
Adjustable spray wand position	●	●	●
Adjustable water spray intensity	●	●	●
Adjustable water temperature	●	●	●
Comfort			
Adjustable Warm Air Dryer temperature	-	●	●
Programmable user profiles	-	●	●
Night light function	●	●	●
Remote control	●	●	●
Blocking function via remote control	●	-	-
Illuminated buttons with setting indication	●	●	●
Specifications			
Shower water heated by instant heater	●	●	●
Energy saving mode	n/a	●	●
Nominal voltage	120 V ~	120 V ~	120 V ~
Frequency	60 Hz	60 Hz	60 Hz
Maximum rating	1050 W	1650 W	1650 W
Water line pressure	0,07 – 0,75 MPa	0,07 – 0,75 MPa	0,07 – 0,75 MPa
Max. recommended water hardness	< 2,4 mmol/l (< 14° dH bzw. 24° fH)	< 2,4 mmol/l (< 14° dH bzw. 24° fH)	< 2,4 mmol/l (< 14° dH bzw. 24° fH)
Temperature range			
Operating temperature	39 - 104 °F	39 - 104 °F	39 - 104 °F
Water temperature	90 - 104 °F	90 - 104 °F	90 - 104 °F
Seat temperature	-	91 - 99 °F	91 - 99 °F
Temperature of Warm Air Dryer	-	100 - 122 °F	100 - 122 °F

* only spray wand / An Electrical Leakage Protection to the bathroom socket is required prior to the installation of the product.

SensoWash® Recommendation for SensoWash® + Ceramic

Series	Ceramic	Ceramic type	SensoWash® Slim				SensoWash® Starck C			SensoWash® Starck
			# 611000	# 611200	# 611300	# 611400	# 610001	# 610200	# 610300	# 610000
Darling New	# 254459	Toilet wall-mounted	●				●			
Darling New	# 254409	Toilet wall-mounted							●	
Darling New	# 212351	One-piece toilet					●			
Darling New	# 212301	One-piece toilet							●	
Darling New	# 212651	Two-piece toilet					●			
Darling New	# 212601	Two-piece toilet							●	
DuraStyle	# 253759	Toilet wall-mounted		●				●		
DuraStyle	# 254259	Toilet wall-mounted Rimless®		●				●		
DuraStyle	# 215659	Toilet close-coupled		●				●		
DuraStyle	# 215751	One-piece toilet		●				●		
DuraStyle	# 216051	Two-piece toilet		●				●		
Happy D.2	# 255059	Toilet wall-mounted Rimless®			●				●	
Happy D.2	# 212151	One-piece toilet							●	
ME by Starck	# 252959	Toilet wall-mounted Rimless®	●							
ME by Starck	# 216959	Toilet floor standing	●							
ME by Starck	# 217151	Two-piece toilet	●							
P3 Comforts	# 256159	Toilet wall-mounted Rimless®				●				
P3 Comforts	# 216659	Toilet floor standing Rimless®				●				
P3 Comforts	# 216851	Two-piece toilet				●				
Starck 2	# 253359	Toilet wall-mounted	●				●			
Starck 2	# 212959	Toilet close-coupled	●				●			
Starck 2	# 213351	One-piece toilet					●			
Starck 2	# 253309	Toilet wall-mounted							●	
Starck 2	# 212909	Toilet close-coupled							●	
Starck 2	# 213301	One-piece toilet							●	
Starck 3	# 222659	Toilet wall-mounted	●				●			
Starck 3	# 214159	Toilet close-coupled					●			
Starck 3	# 212051	One-piece toilet					●			
Starck 3	# 212551	Two-piece toilet					●			
Starck 3	# 222609	Toilet wall-mounted							●	
Starck 3	# 215859	Toilet floor standing	●				●			
Starck 3	# 214109	Toilet close-coupled							●	
Starck 3	# 212001	One-piece toilet							●	
Starck 3	# 212501	Two-piece toilet							●	