

FS Damero

Single fired floor tiles






FS DAMERO | FS ROMBOS-N




FS-0

13 patterns

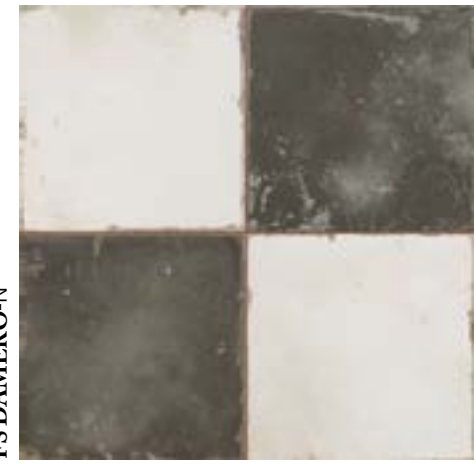

FS DAMERO-N

13 patterns

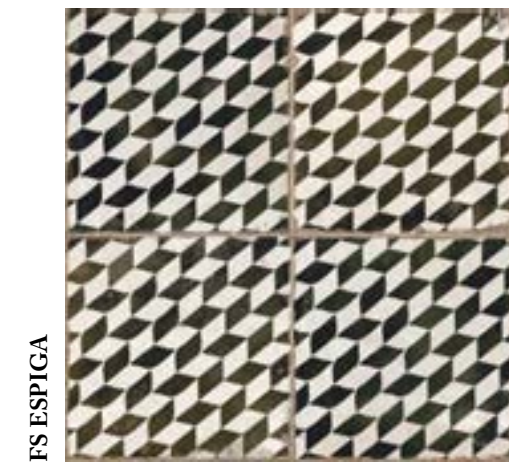

FS ESPIGA


3 patterns



FS ROMBOS-N

4 patterns

FS DAMERO



45 * 45 * 1,05 cm | 17 3/4 * 17 3/4 * 7/16"

	NO RECTIFIED	NATURAL PRICE CODE BN14
FS DAMERO-N		15077
FS-0		13305
FS ESPIGA		15816
FS ROMBOS-N		16447

CARACTERÍSTICAS TÉCNICAS | TECHNICAL CHARACTERISTICS

joint 1,5 mm	versatile	matt	diferent shades
shade variation V3	various graphics	various moulds	

CARACTERÍSTICAS TÉCNICAS ANTIDESLIZAMIENTO | ANTI-SLIP CHARACTERISTICS

Ensayo Essay	Características Features	Resultado Result
DIN 51130	Ángulo crítico (Pies calzados) Critical angle (footwear)	R9
BS-7976-2	Antideslizamiento (Test del péndulo) Slip resistance (Pendulum test)	+36Wet
UNE-ENV-12633	Antideslizamiento (Test del péndulo) Slip resistance (Pendulum test)	Class 1
ISO 10545-7	Resistencia a la Abrasión Superficial/ Resistance to Surface Abrasion	4

PIEZA COMPLEMENTARIA | COMPLEMENTARY PIECE
*Pedido mínimo 10 unidades | Minimum order 10 items

Rodapie - Skirting

R. FS-0

8 * 45 cm | 3 1/8 * 17 3/4" P8

EMBALAJE | PACKING

Formato Sizes	Cajas Boxes			Pallet			Cont./20'	Cont./20'	
	Piezas	m ² / sq.m	kg	Cajas	m ² / sq.m	kg	21500 kg.	24000 kg.	
cm							m ² / sq.m	m ² / sq.m	
45 * 45 * 1,05	5	1,00	23,14	66	66,00	1552,24	102 * 80 * 105	914,16	1020,46
inch							ft ²	ft ²	
17 3/4 * 17 3/4 * 7/16	5	10,76	50,91	66	710,42	3414,93	40 3/16 * 31 1/2 * 41 5/16	9839,96	10984,14