

WHICH SHOWER SUITS YOUR BATHROOM?

Gustavsberg's showers maintain the highest standards of quality as regards both design and function, and they are available in a range of combinations to suit bathrooms of all types. However, before choosing the model you want, you should take some time to think about the conditions in your bathroom. For a shower corner, you need water-tight walls, a water-tight floor and a floor drain in the corner where you wish to install the shower. All Gustavsberg

wall and floor profiles are adjustable so you can be sure of a level shower even if the walls are angled and the floor slopes. A shower cabin is a versatile solution, especially if the floor in your bathroom cannot withstand the effects of water. The shower cabin itself functions as a water-tight space and requires only a minimum of work to install. A spare corner, connection to a water supply and a drain are all you need.

SHOWER WALLS AND CORNERS WITH SWING DOORS



BUILT-IN ELEVATING HINGES LIFT OUR SLIDING DOORS 5 MM. A BACKFLOW GUARD IS SUPPLIED FOR FITTING IF THE INCLINE TO THE FLOOR DRAIN IS NOT QUITE SUFFICIENT.

SHOWER CORNER WITH ROUNDED OR STRAIGHT SIDE-HUNG DOORS. THE DOORS OPEN BOTH INWARDS AND OUTWARDS – WHICH CAN SAVE VALUABLE SPACE IN A SMALL BATHROOM AVAILABLE IN SEVERAL SIZES.

SHOWER CABINS WITH ROUNDED SLIDING DOORS

Shower cabins are the best solution for rooms with walls and floors that may not be fully water-tight. Shower cabins are actually enclosed, water-tight units. All you need is a spare square metre and access to hot and cold water and a drain. This cabin comes with a built-in mixer and shower set. Choose between white or chromed profiles. Also available with straight doors.



NACQ 900 x 900 mm

SHOWER CABIN WITH STRAIGHT SLIDING DOORS

This model comes with a shower set, but needs to be completed with a shower mixer. Choose between white or chromed profiles.



NCC 800 x 800 mm

SHOWER CORNERS WITH SLIDING DOORS



SHOWER CORNER WITH ROUNDED SLIDING DOORS. CHOOSE BETWEEN CHROMED OR WHITE PROFILES. AVAILABLE IN MANY SIZES – ALSO WITH STRAIGHT DOORS.



TILT-IN AND ADJUSTABLE FLOOR PROFILE WITH "RUN-OFF HOLES" IN SLIDING DOORS.




HOLES FOR EXTERNAL PIPES IN EXTRA-WIDTH PROFILE ON SLIDING DOORS.



SHOWER WALL WITH STRAIGHT DOORS AND WHITE PROFILES.

NC 900 x 900 mm



SHOWER WALLS ARE CONSTANTLY SUBJECTED TO WATER, SOAP, OILS, SHAMPOO AND LIMESCALE. FOR THIS REASON, ALL GUSTAVSBERG SHOWERS ARE FITTED WITH "CLEAR GLASS" – A PROTECTIVE EXTERIOR LAYER THAT FACILITATES CLEANING AND HELPS REDUCE THE AMOUNT OF DETERGENT YOU NEED TO USE.



THE BOTTOM EDGE OF SHOWER CORNERS, WHERE THE DOOR MEETS THE FLOOR PROFILE, IS USUALLY VERY DIFFICULT TO KEEP CLEAN. OUR "TILT-IN" FUNCTION MAKES IT SIMPLE FOR YOU TO REMOVE THE SHOWER DOORS FROM THE FLOOR PROFILE FOR MORE EFFICIENT CLEANING AND IMPROVED HYGIENE.



THE ELEVATING HINGE IS A SMART DETAIL THAT LIFTS THE SHOWER DOOR 5 MM EVERY TIME YOU OPEN AND CLOSE IT. THIS MINIMISES WEAR ON BOTH THE FLOOR AND THE SHOWER DOORS. A PRACTICAL FUNCTION THAT PROVIDES A SENSE OF AUTHENTIC LUXURY.




INDEPENDENT CERTIFICATION

The Nordic Quality symbol is allocated to certified sanitation products in line with established requirements controlled by INSTA-CERT. These products meet set criteria for production, guarantee period, spare parts, documentation and technical suitability for installation in the Nordic region.

GOOD TO KNOW ...







- Safety requirements are strict, and we test our products in accordance with CE norms for safety, function, tightness and durability.
- Our most popular model is the shower wall, which is usually fitted directly to a water-resistant floor that slopes gently down to a drain outlet.
- In order to be able to fit a shower cabin without any problems, your bathroom ceiling height should be at least 250 cm.

- When measuring the size of unequal-sided shower walls (e.g. 100 x 80), tape a corner on the floor and measure from left to right. This helps ensure that you measure correctly.



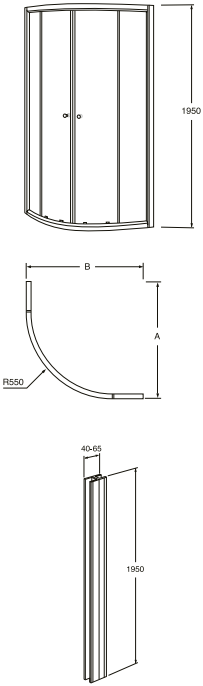


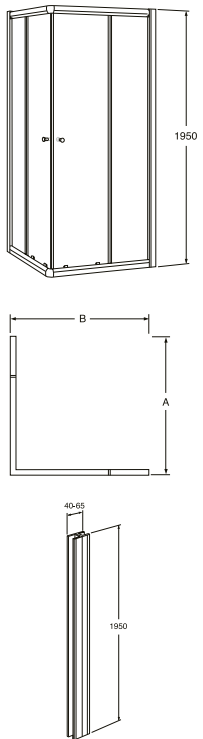


SLIDING DOORS FOR CORNER INSTALLATION

- Tempered safety glass
- Clear glass for simple, eco-friendly cleaning
- White or chromed profiles
- Pivot-in function for easy cleaning
- The 25 mm adjustable wall profile ensures a level shower even if the walls are angled.
- Pipe routing possible can be concealed in the wall profile
- Adjustable floor profile to ensure a level shower even if the floor slopes.
- Drainage holes in the floor profile convert the floor drain in the shower into an evacuation drain
- Widening profile, 40–65 mm as an optional extra. It is possible to connect multiple profiles.
- On the NC model, it is possible to work with unequal-sided measurement combinations

		AxB Width dimension/adjustability in mm.		ART no	
 <p>Detailed dimension sketches of each of the sizes are available at www.gustavsberg.com.</p>	 <p>NQ shower corner with rounded sliding doors</p> <p>With chromed profiles; 6 mm walls</p> <p>NQ80G-C, 80x80 cm NQ90G-C, 90x90 cm NQ100G-C, 100x100 cm NE-C Widening profile, chrome</p> <p>With white profiles; 6 mm walls</p> <p>NQ80G-W, 80x80 cm NQ90G-W, 90x90 cm NQ100G-W, 100x100 cm NE-W Widening profile, white</p> 	<p>780–805x780–805 880–905x880–905 980–1005x980–1005 Widening adjustment 40–65 mm</p> <p>780–805x780–805 880–905x880–905 980–1005x980–1005 Widening adjustment 40–65 mm</p> <p>The measurement under A x B refers to outside profile measurement, and the max. measurements stated can only be achieved with straight, right-angled floors and walls.</p>	<p>UDW8080NAU164W-61 UDW9090NAU164W-61 UDW1010NAU164W-61 UPGUHWP-61</p> <p>UDW8080NAU164W-01 UDW9090NAU164W-01 UDW1010NAU164W-01 UPGUHWP-01</p>		
 <p>Detailed dimension sketches of each of the sizes are available at www.gustavsberg.com.</p>	 <p>NC shower corner with straight sliding doors</p> <p>With chromed profiles; 8 mm walls</p> <p>NC80G-C 80x80 cm NC90G-C 90x90 cm NC100G-C 100x100 cm NC89G-C 80x90 cm NC98G-C 90x80 cm NC810G-C 80x100 cm NC108G-C 100x80 cm NE-C Widening profile, chrome</p> <p>With white profiles; 8 mm walls</p> <p>NC80G-W, 80x80 cm NC90G-W, 90x90 cm NC100G-W, 100x100 cm NC89G-W, 80x90 cm NC98G-W, 90x80 cm NC810G-W, 80x100 cm NC108G-W, 100x80 cm NE-W Widening profile, white</p> 	<p>780–805x780–805 880–905x880–905 980–1005x980–1005 780–805x880–905 880–905x780–805 780–805x980–1005 980–1005x780–805 Widening adjustment 40–65 mm</p> <p>780–805x780–805 880–905x880–905 980–1005x980–1005 780–805x880–905 880–905x780–805 780–805x980–1005 980–1005x780–805 Widening adjustment 40–65 mm</p> <p>The measurement under A x B refers to outside profile measurement, and the max. measurements stated can only be achieved with straight, right-angled floors and walls.</p>	<p>UDW8080NAU120W-61 UDW9090NAU120W-61 UDW1010NAU120W-61 UDW8090NAU120RW-61 UDW9080NAU120LW-61 UDW8010NAU120RW-61 UDW1080NAU120LW-61 UPGUHWP-61</p> <p>UDW8080NAU120W-01 UDW9090NAU120W-01 UDW1010NAU120W-01 UDW8090NAU120RW-01 UDW9080NAU120LW-01 UDW8010NAU120RW-01 UDW1080NAU120LW-01 UPGUHWP-01</p>		

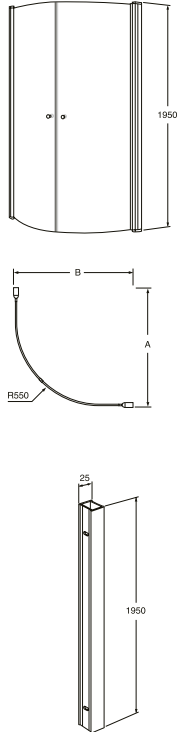SWING DOORS FOR CORNER INSTALLATION

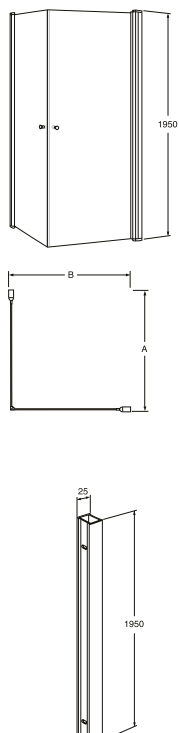- Tempered safety glass
- Clear glass for simple, eco-friendly cleaning
- No floor profiles, has to be installed with a slope down to the floor drain.
- Chromed profiles
- Splash guard supplied for cases where the floor slope is not sufficient
- Rising hinges lift the doors 5 mm when they are opened
- Opening angle: 180 degrees
- The 20 mm adjustable wall profile ensures a level shower even if the walls are angled.
- Widening profile, 25 mm as an optional extra.
- Unequal-sided measurement combinations possible

		A x B Width dimension/adjustability in mm.		ART no																												
 <p>Detailed dimension sketches of each of the sizes are available at www.gustavsberg.com.</p>		<p>SQ shower corner with rounded swing doors</p> <p>With chromed profiles; 6 mm walls</p> <table border="0"> <tr><td>SQ80G,</td><td>80x80 cm</td></tr> <tr><td>SQ90G,</td><td>90x90 cm</td></tr> <tr><td>SQ100G,</td><td>100x100 cm</td></tr> <tr><td>SQ810G,</td><td>80x100 cm</td></tr> <tr><td>SQ108G,</td><td>100x80 cm</td></tr> <tr><td>SQ89G,</td><td>80x90 cm</td></tr> <tr><td>SQ98G,</td><td>90x80 cm</td></tr> </table> <p>SE-C Widening profile, chrome</p> 	SQ80G,	80x80 cm	SQ90G,	90x90 cm	SQ100G,	100x100 cm	SQ810G,	80x100 cm	SQ108G,	100x80 cm	SQ89G,	80x90 cm	SQ98G,	90x80 cm	<table border="0"> <tr><td>780-800x780-800</td></tr> <tr><td>880-900x880-900</td></tr> <tr><td>980-1000x980-1000</td></tr> <tr><td>780-800x980-1000</td></tr> <tr><td>980-1000x780-800</td></tr> <tr><td>780-800x880-900</td></tr> <tr><td>880-900x780-800</td></tr> </table> <p>Additional adjustment width 25 mm</p> <p>The measurement under A x B refers to outside profile measurement, and the max. measurements stated can only be achieved with straight, right-angled floors and walls.</p>	780-800x780-800	880-900x880-900	980-1000x980-1000	780-800x980-1000	980-1000x780-800	780-800x880-900	880-900x780-800	<table border="0"> <tr><td>UDW8080SKA120W-61</td></tr> <tr><td>UDW9090SKA120W-61</td></tr> <tr><td>UDW1010SKA120W-61</td></tr> <tr><td>UDW8010SKA120RW-61</td></tr> <tr><td>UDW1080SKA120LW-61</td></tr> <tr><td>UDW8090SKA120RW-61</td></tr> <tr><td>UDW9080SKA120LW-61</td></tr> </table> <p>UPGUYDG262-337</p>	UDW8080SKA120W-61	UDW9090SKA120W-61	UDW1010SKA120W-61	UDW8010SKA120RW-61	UDW1080SKA120LW-61	UDW8090SKA120RW-61	UDW9080SKA120LW-61
SQ80G,	80x80 cm																															
SQ90G,	90x90 cm																															
SQ100G,	100x100 cm																															
SQ810G,	80x100 cm																															
SQ108G,	100x80 cm																															
SQ89G,	80x90 cm																															
SQ98G,	90x80 cm																															
780-800x780-800																																
880-900x880-900																																
980-1000x980-1000																																
780-800x980-1000																																
980-1000x780-800																																
780-800x880-900																																
880-900x780-800																																
UDW8080SKA120W-61																																
UDW9090SKA120W-61																																
UDW1010SKA120W-61																																
UDW8010SKA120RW-61																																
UDW1080SKA120LW-61																																
UDW8090SKA120RW-61																																
UDW9080SKA120LW-61																																
 <p>Detailed dimension sketches of each of the sizes are available at www.gustavsberg.com.</p>		<p>SC shower corner with straight swing doors</p> <p>With chromed profiles; 8 mm walls</p> <table border="0"> <tr><td>SC80G,</td><td>80x80 cm</td></tr> <tr><td>SC90G,</td><td>90x90 cm</td></tr> <tr><td>SC100G,</td><td>100x100 cm</td></tr> <tr><td>SC810G,</td><td>80x100 cm</td></tr> <tr><td>SC108G,</td><td>100x80 cm</td></tr> <tr><td>SC89G,</td><td>80x90 cm</td></tr> <tr><td>SC98G,</td><td>90x80 cm</td></tr> </table> <p>SE-C Widening profile, chrome</p> 	SC80G,	80x80 cm	SC90G,	90x90 cm	SC100G,	100x100 cm	SC810G,	80x100 cm	SC108G,	100x80 cm	SC89G,	80x90 cm	SC98G,	90x80 cm	<table border="0"> <tr><td>780-800x780-800</td></tr> <tr><td>880-900x880-900</td></tr> <tr><td>980-1000x980-1000</td></tr> <tr><td>780-800x980-1000</td></tr> <tr><td>980-1000x780-800</td></tr> <tr><td>780-800x880-900</td></tr> <tr><td>880-900x780-800</td></tr> </table> <p>Additional adjustment width 25 mm</p> <p>The measurement under A x B refers to outside profile measurement, and the max. measurements stated can only be achieved with straight, right-angled floors and walls.</p>	780-800x780-800	880-900x880-900	980-1000x980-1000	780-800x980-1000	980-1000x780-800	780-800x880-900	880-900x780-800	<table border="0"> <tr><td>UDW8080SKA160W-61</td></tr> <tr><td>UDW9090SKA160W-61</td></tr> <tr><td>UDW1010SKA160W-61</td></tr> <tr><td>UDW8010SKA160RW-61</td></tr> <tr><td>UDW1080SKA160LW-61</td></tr> <tr><td>UDW8090SKA160RW-61</td></tr> <tr><td>UDW9080SKA160LW-61</td></tr> </table> <p>UPGUYDG262-337</p>	UDW8080SKA160W-61	UDW9090SKA160W-61	UDW1010SKA160W-61	UDW8010SKA160RW-61	UDW1080SKA160LW-61	UDW8090SKA160RW-61	UDW9080SKA160LW-61
SC80G,	80x80 cm																															
SC90G,	90x90 cm																															
SC100G,	100x100 cm																															
SC810G,	80x100 cm																															
SC108G,	100x80 cm																															
SC89G,	80x90 cm																															
SC98G,	90x80 cm																															
780-800x780-800																																
880-900x880-900																																
980-1000x980-1000																																
780-800x980-1000																																
980-1000x780-800																																
780-800x880-900																																
880-900x780-800																																
UDW8080SKA160W-61																																
UDW9090SKA160W-61																																
UDW1010SKA160W-61																																
UDW8010SKA160RW-61																																
UDW1080SKA160LW-61																																
UDW8090SKA160RW-61																																
UDW9080SKA160LW-61																																

SWING DOORS FOR NICHE INSTALLATION

- Tempered safety glass
- Clear glass for simple, eco-friendly cleaning
- Chromed profiles
- No floor profiles, has to be installed with a slope down to the floor drain
- Splash guard supplied for cases where the floor slope is not sufficient
- Rising hinges lift the door 5 mm when opened
- Opening angle: 180 degrees
- The 20 mm adjustable wall profile ensures a level shower even if the walls are angled
- Widening profile, 25 mm as an optional extra
- Reversible for right or left-hand installation

		A Width dimension/adjustability in mm.		ART no
 <p>Detailed dimension sketches of each of the sizes are available at www.gustavsberg.com.</p>		SA straight swing door for niche installation With chromed profiles; 8 mm walls SA80G, 80 cm SA90G, 90 cm SA100G, 100 cm SE-C Widening profile, chrome		UDW0080SKA100W-61 UDW0090SKA100W-61 UDW0100SKA100W-61 UPGUYDG262-337
		780 – 820 880 – 920 980 – 102 Additional adjustment width 25 mm The max. dimension stated under "A" can only be achieved with straight and right-angled walls and floor.		
				

SHOWER ENCLOSURE WITH BUILT-IN MIXER

- Tempered safety glass
- Clear glass for simple, eco-friendly cleaning
- White or chromed profiles
- Pivot-in function for easy cleaning
- Adjustable feet, 20 mm
- Patterned rear walls conceal pipe connections
- Built-in thermostatic mixer with shower set
- The shower tub features removable front panels in the same colour as the enclosure profiles
- Water trap can be cleaned from inside the enclosure

		Width measurement in mm	ART no
		NACC shower enclosure with straight sliding doors With chromed profiles; 6 mm walls NACC 900x900	USE90NAC10SS61W-01
		With white profiles; 6 mm walls NACC 900x900	USE90NAC10SS01W-01
		NACQ shower enclosure with rounded sliding doors With chromed profiles; 6 mm walls NACQ 900x900	USE90NAC40SS61W-01
		With white profiles; 6 mm walls NACQ 900x900	USE90NAC40SS01W-01

SHOWER ENCLOSURE

- Tempered safety glass
- Clear glass for simple, eco-friendly cleaning
- White or chromed profiles
- Pivot-in function for easy cleaning
- Adjustable feet, 20 mm
- Patterned rear walls conceal pipe connections
- Shower set supplied
- The shower tub features removable front panels in the same colour as the enclosure profiles



		Width measurement in mm		ART no	
		<p>NCC shower enclosure with straight sliding doors, 80x80 cm</p> <p>With chromed profiles; 6 mm walls NCC-G 80C</p> <p>With white profiles; 6 mm walls NCC-G 80W</p>	<p>800x800</p> <p>800x800</p>	<p>UPGUYDG262-337</p> <p>USE80NOC10SS01W-01</p>	
		<p>NCC shower enclosure with straight sliding doors, 90x90 cm (only with chromed profiles)</p> <p>With chromed profiles; 6 mm walls NCC-G 90C</p>	<p>900x900</p>	<p>USE90NOC10SS61W-01</p>	
		<p>Mixer attachment (pair) for 160 c-c shower mixers</p> <p>Needed to enable installation of the mixer in the shower cabinet.</p>		<p>UPGUYDG262-337</p>	



SHOWERS

BATHTUB WALLS

- Tempered safety glass
- Clear glass for simple, eco-friendly cleaning
- Chromed profiles
- Rising hinges lift the door 5 mm when opened
- The 20 mm adjustable wall profile ensures a level shower even if the walls are angled.
- Opening angle: 180 degrees
- Reversible for right or left-hand installation

		A Width dimension/adjustability in mm.		ART no
		LB bathtub wall With chromed profiles; 6 mm walls LB70G, 70 cm LB80G, 80 cm	700–720 800–820 The max. dimension stated under "A" can only be achieved with straight and right-angled walls and floor.	UDW0070LOG170W-61 UDW0080LOG170W-61
		LB 2-section bathtub wall With chromed profiles; 6 mm walls The inner wall is fixed and the outer wall opens both inwards and outwards. LB6040G	See drawing The max. dimension stated under "A" can only be achieved with straight and right-angled walls and floor.	UDW6040LOG171W-61