

MULTI STONE

IVORY · GREY · GRAPHITE
MARFIL · BEIGE

10,5 x 56 cm · 4" x 22"

PIEDRA
STONE

MULTISTONE

10,5 x 56 cm · 4" x 22"
MATT FINISH / ACABADO MATE
RED BODY PORCELAIN



Porcelain Tiles
Porcelánico



Moderate Relief
Relieve moderado



Floor Tile
Pavimento



Wall Tile
Revestimiento



Matt
Mate



Anti-Slip
Anti-deslizante



Multistone Ivory
10,5 x 56 CM
R10 FINISH (C2)

GT8A



Multistone Marfil
10,5 x 56 CM
R10 FINISH (C2)

GT8A




Multistone Grey
10,5 x 56 CM
R10 FINISH (C2)

GT8A



Multistone Beige
10,5 x 56 CM
R10 FINISH (C2)


GT8A



Multistone Graphite
10,5 x 56 CM
R10 FINISH (C2)

GT8A

90 DIFFERENT DESIGNS ON 10 DIFFERENT RELIEFS

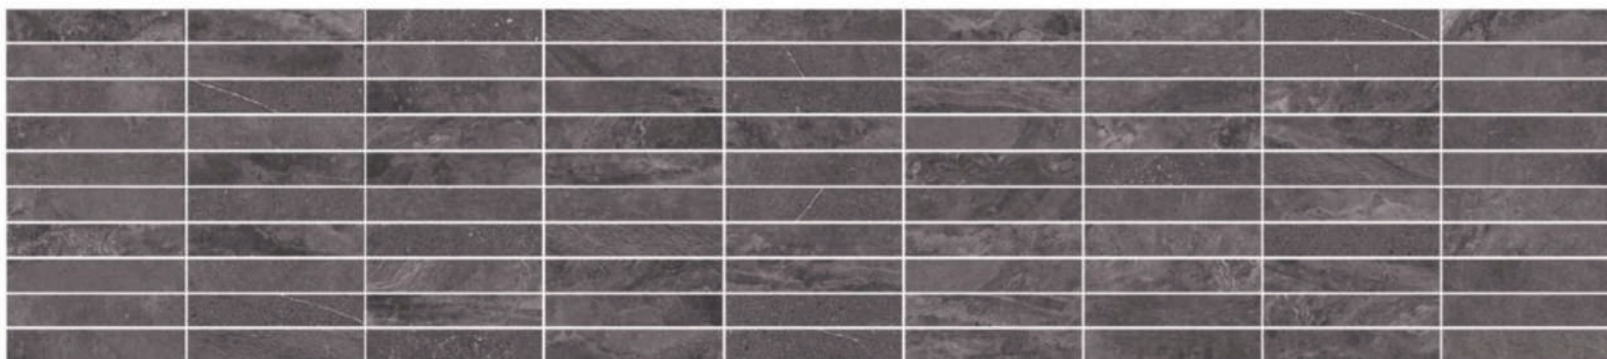

PACKING	BOXES PALLET	SQM BOX	SQM PALLET	KGS PIECE	KGS BOX	KGS PALLET	PIECES BOX	PALLETS CONTAINER	SQM CONTAINER	WEIGHT CONTAINER	THICKNESS	ABSORPTION
10,5 x 56 CM - DK	48	1,06	50,88	1,150	20,82	1.014	18	25	1.272,00	25.352	0,90	E<0,5



Floor/ Suelo: Multistone graphite 10,5 x 56 cm **Pared/ Wall :** Multistone grey 10,5 x 56 cm & Multistone graphite 10,5 x 56 cm



Floor/ Suelo: Multistone graphite 10,5 x 56 cm **Pared/ Wall :** Multistone Graphite, Grey, Ivory 10,5 x 56 cm



Floor/ Suelo: Multistone Beige 10,5 x 56 cm



Floor/ Suelo: Multistone Marfil 10,5 x 56 cm

LA NATURE

MERCHANDISING



Cuna expositor LA NATURE · 4 paneles
Medida paneles : 700 x 950 x 15 mm


Tile display LA NATURE · 4 panels
Panel size: 700 x 950 x 15 mm




Panel técnico MULTISTONE
COLD GAMMA · REF-D20_005
1005 x 1925 mm

Panel técnico MULTISTONE
WARM GAMMA · REF-D20_006
1005 x 1925 mm

TECHNICAL SHEET CARACTERÍSTICAS TÉCNICAS

UNE-EN.14411:2016 Norma/Norm		Gres porcelánico Porcelain Tiles	 DUALKER
UNE-EN-ISO 10545		ANEXO / ANNEX G	ANEXO / ANEX G
		GRUPO / GROUP Bla	GRUPO / GROUP Bla
		N≥15cm	N≥15cm
Absorción de agua /Water absorption	E≤0,50%	E≤0,30%	
Fuerza de Rotura en N /Breaking Strength, in N	≥ 1300N	≥ 2000N	
Resistencia a la Flexión N/mm₂ /Modulus of rupture, in N/mm ₂	Media / Average ≥ 35	Media/Average ≥ 43	

	TEST METHOD	STANDARD	 DUALKER
	RESISTENCIA AL DESLIZAMIENTO /SLIP RESISTANCE	UNE-ENVE-12633	CTE
BS 7976-2: 2002		PTV	LOW (40)
AS/NZS 4586: 2013		Pendulum SRV	P3
DIN 51130: 2014		Inclined Plane	R10
ANSI A137.1: 2012 (DCOF)		≥ 0,42W	0,72W



CONTACT US:

Ctra. de Viver al Puerto de Burriana, km 56,9
ONDA (CASTELLÓN) · SPAIN

Tel: (+34) 964 77 11 66

www.dualgres.com export@dualgres.com

