



Anti Slip  
SURFACE




Anti Slip  
SURFACE




Anti Slip  
SURFACE



Anti Slip  
SURFACE

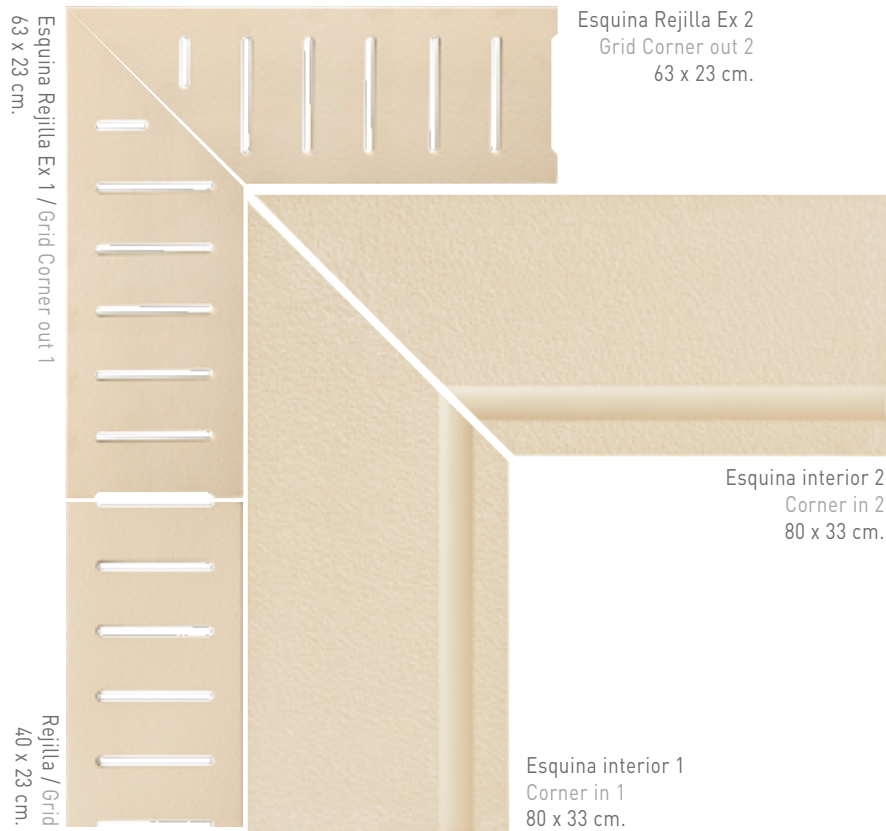


Esquina exterior 2 / Corner out 2  
80 x 33 cm.

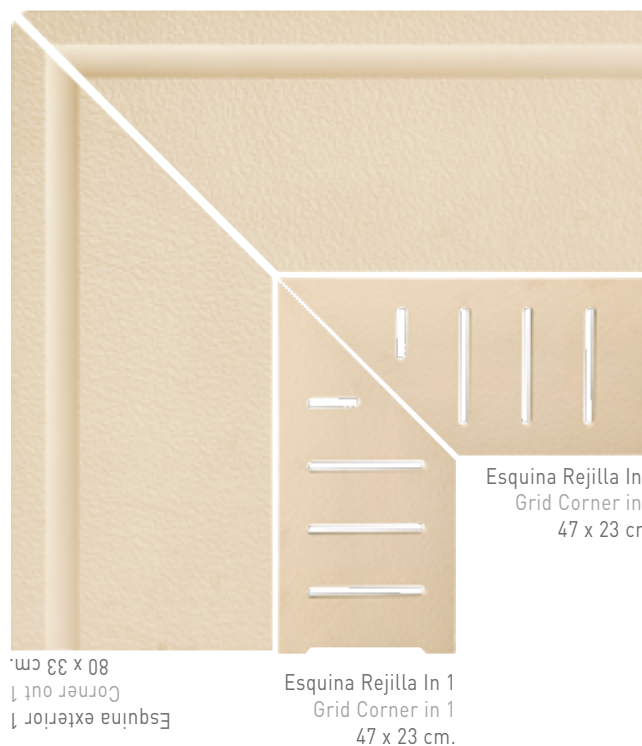


Rejilla / Grid  
80 x 23 cm.



Borde de piscina / Pool edge  
80 x 33 cm.

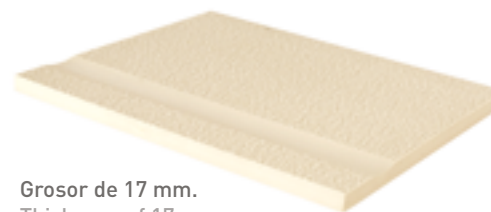

Grosor de 17 mm.  
Thickness of 17 mm.

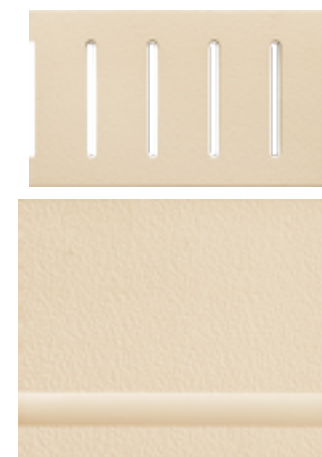



















Borde de piscina  
Pool edge  
40 x 33 cm.

FORMATO	PESO PIEZA	PZAS. CAJA	M <sup>2</sup> . CAJA	PESO CAJA	Nº CAJAS PALET	PESO PALET
SIZE	PIECES WEIGHT	PIECES / BOX	SQM / BOX	WEIGHT BOX	BOXES / PALLET	WEIGHT PALLET
33 x 40	-----	5	-----	-----	48	1.300 Kg.
33 x 80	-----	3	-----	-----	36	1.180 Kg.



# Características Técnicas / Technical Features

DESCRIPCIÓN ICONOGRÁFICA DE LAS CARACTERÍSTICAS TÉCNICAS DEL PRODUCTO / ICONOGRAPHIC DESCRIPTION OF THE PRODUCT'S TECHNICAL FEATURES

<p>Pavimento Floor tile</p> 	<p>Dureza mohs UNE-EN 67.101 Surface scratch hardness (mohs scale) UNE-EN 67.101</p>  <p>6 - 8</p>
<p>Alto tránsito Busy transit</p> 	<p>Resistencia a la flexión UNE-EN 10545-4 Bending resistance UNE-EN 10545-4</p>  <p>35-55 N/mm<sup>2</sup></p>
<p>Destonificado Colour Variety</p> 	<p>Absorción de agua UNE-EN 10545-3 Water absorption UNE-EN 10545-3</p>  <p>&lt; 0,5</p>
<p>Borde de piscina. Grosor de pieza Swimming pool's edge Thickness</p>  <p>17 mm.</p>	<p>Higiénico: resistente a productos de limpieza con químicas fuertes. UNE-EN 10545-13 Hygienic: resistance to chemical etching UNE-EN 10545-13</p>  <p>Resiste</p>
<p>Coefficiente de dilatación térmica UNE-EN 10545-8 Lineal thermal expansion coefficient UNE-EN 10545-8</p>  <p>&lt; 9x10<sup>-6</sup>/°C</p>	<p>Resistencia a la abrasión profunda. UNE-EN 10545-6 Deep abrasion resistance UNE-EN 10545-6</p>  <p>&lt;175 mm<sup>3</sup></p>
<p>Resistencia a las manchas UNE-EN 10545-14 Resistance to staining UNE-EN 10545-14</p>  <p>Resiste /resist</p>	<p>Resistencia al choque térmico UNE-EN 10545-9 Resistance against thermal shocks UNE-EN 10545-9</p>  <p>Resiste /resist</p>
<p>Junta estéticamente recomendada Joint aestetically recommended</p>  <p>Junta 2 mm</p>	<p>Resistencia al hielo UNE-EN 10545-12 Frost resistance UNE-EN 10545-12</p>  <p>Resiste /resist</p>
<p>Resistencia al deslizamiento pie calzado Sliding coefficient barefoot (DIN 51130)</p>  <p>R-10 GRAIN <math>\leq 12^\circ</math> A <math>20^\circ</math></p>	<p>Coefficiente deslizamiento pie descalzo (DIN 51097) Sliding coefficient naked foot (DIN 51097)</p>  <p>Grupo C</p>
 <p>Resistencia al deslizamiento Sliding resistance UNE-ENV 12633</p>  <p>GRAIN: Clase 3</p>	<p>*CLASE 3: RECOMENDADO PARA EXTERIORES, PISCINAS Y ZONAS HÚMEDAS. *CLASS 3: RECOMMENDED FOR EXTERIORS, SWIMMING POOLS AND WET AREAS.</p>

