

# TECH

## URBAN CERAMIC SOLUTIONS

NATUCER

EVOLUTION  
EXTRUDED PORCELAIN TILE

inklinker  
NETECH

fine RESISTANCE  
R11 - Class III

AntiSlip

MÁXIMA EFICACIA EN ZONAS URBANAS, RESIDENCIALES Y ESPACIOS EXTERIORES DE TRÁNSITO ELEVADO Y ALTAS EXIGENCIAS TÉCNICAS

GET THE MAXIMUM EFFECTIVENESS IN URBAN AND RESIDENTIAL AREAS. PERFECT FOR EXTERNAL HIGH TRAFFIC AND TECHNICAL REQUIREMENTS AREAS.



3546 Nw  
ALTA RESISTENCIA A LA FUERZA DE ROTURA  
HIGH BREAKING STRENGTH

ELEVADAS PROPIEDADES ANTIDESLIZAMIENTO  
HIGH ANTI-SLIP COEFFICIENTS  
Clase III - R11

MAIOR RESISTENCIA A LA FLEXIÓN  
HIGH BENDING RESISTANCE  
32 N/mm2

# TECH · GEO

FEEL THE STONE STRENGTH




14mm  
ESPESOR  
THICKNESS

piezas especiales special pieces



PELDAÑO CURVO  
22,5x33/4 (G 16) 8,8"x13"



ZÓCALO  
9x30 (G 06) 3,5"x11,8"



ZANQUÍN - IZQ. / DCHA  
9x30 (G 16) 3,5"x11,8"




TECH-GEO GLACIER  
22,5x33 (G 58) 8,8"x13"  
22,5x22,5 (G 58) 8,8"x8,8"  
11x22,5 (G 39) 4,3"x8,8"



TECH-GEO RIVER  
22,5x33 (G 58) 8,8"x13"  
22,5x22,5 (G 58) 8,8"x8,8"  
11x22,5 (G 39) 4,3"x8,8"



TECH-GEO MOUNTAIN  
22,5x33 (G 58) 8,8"x13"  
22,5x22,5 (G 58) 8,8"x8,8"  
11x22,5 (G 39) 4,3"x8,8"

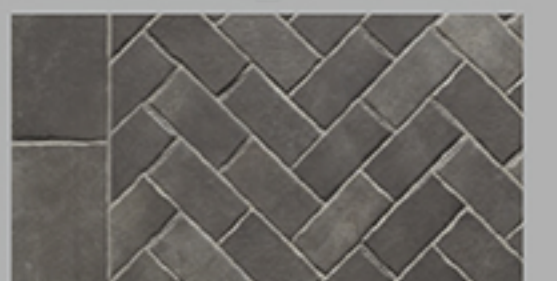

TECH-GEO VOLCANO  
22,5x33 (G 58) 8,8"x13"  
22,5x22,5 (G 58) 8,8"x8,8"  
11x22,5 (G 39) 4,3"x8,8"

+ info: [www.natucer.es](http://www.natucer.es) NATUCER





TECH  
NATUCER

NATUCER, S.L.

C/ Les Forques, 2 - 12200 Onda (Castellón) Spain - Apdo. nº 6  
Tel. + [34] 964 60 40 66 [6 líneas] - Fax. + [34] 964 60 24 25

[Dpto. Contr. y Admón.]: natucer@natucer.es - Fax. + [34] 964 60 24 25  
[Dpto. Comercial Nac.]: nacional@natucer.es - Fax. + [34] 964 60 24 25  
[Dpto. Comercial Exp.]: comercial@natucer.es - Fax. + [34] 964 60 24 25  
[Dpto. Técnico y Lab.]: laboratorio@natucer.es

www.natucer.es



URBAN  
CERAMIC  
SOLUTIONS



14mm  
ESPESOR  
THICKNESS

MAYOR ESPESOR, MAYORES PRESTACIONES  
THICKER, MORE FEATURES



TECH · RAIL

21x60 / 8" x 23,6"

TECH · RAIL  
HIGH TECH WOODLOOK TILES




2991 Nw  
ALTAMENTE RESISTENTE  
A LA FUERZA DE ROTURA  
HIGH BREAKING STRENGTH



ELEVADAS PROPIEDADES  
ANTIDESLEAMIENTO  
HIGH SLIP-RESISTANCE  
Clase III - R11




MAJOR RESISTENCIA  
A LA FLEXIÓN  
HIGH BENDING RESISTANCE  
33 N/mm2

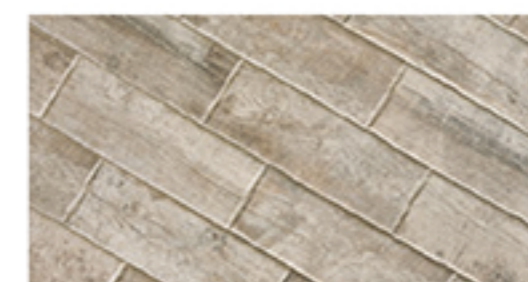

TECH-RAIL ASPEN  
21x60 (G 58) 8"x23,6"




TECH-RAIL NUT  
21x60 (G 58) 8"x23,6"

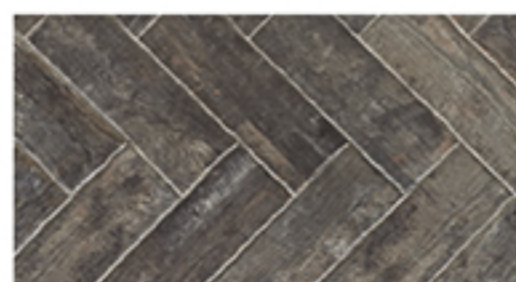

TECH-RAIL TEAK  
21x60 (G 58) 8"x23,6"



TECH-RAIL WILLOW  
21x60 (G 58) 8"x23,6"

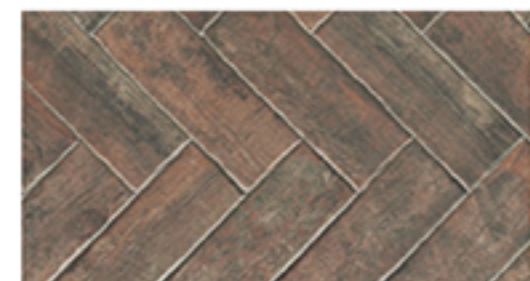

TECH-RAIL CHERRY  
21x60 (G 58) 8"x23,6"

piezas especiales special pieces



ÁNGULO Peldaño ANGULAR  
32x46/4 (G 18 x 2P2) 13" x 18"



PELDAÑO ANGULAR  
32x32/4 (G 17) 13" x 13"



ZÓCALO  
9x30 (G 06) 3,5" x 11,8"



ZANQUÍN - IZQ. / DCHA  
9x30 (G 10) 3,5" x 11,8"

NATUCER + info: www.natucer.es