

Thermatik

The perfect temperature. No variations, or sudden changes. Warm to the precise degree you want it to be. Thermatik controllers feature integrated shut-off valves and concealed thermostats to keep the temperature evenly perfect.

An unmatched showering experience even at low water pressure! An unbeatable combination of convenience, efficiency, safety and style, Thermatik mixers give the choice to select any design to match your bathroom design and any outlet type-be it two, three, four or five outlets, to suit your requirement.

Features

MAX Performance:

- Works efficiently even at low pressure
- No need of pressure pump

Max Flexibility:

- Universal concealed body
- Available in 2, 3, 4, 5 Outlets


Max Safety:

- Thermostat (adjust temperature as desired)
- Non returnable valve to prevent accidental mixing of hot & cold water
- Child Lock (no chance for rotating knob to make water uncomfortably hot/cold)
- Anti scalding feature to shut off the supply in the absence of cold water supply
- Mechanical (Non-electrical) cartridge




THK-681N

Thermatik-R concealed thermostat bath & shower mixer
flow rate: 42.58 l/min*

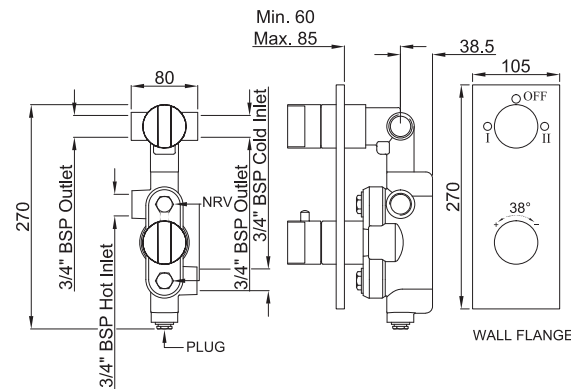


THK-683N

Thermatik-R concealed thermostat with control unit for 3-outlets and integrated shut-off valve
flow rate: 51.80 l/min*

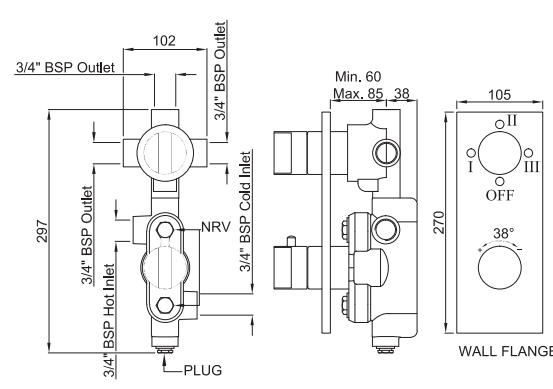


THK-685N

Thermatik-R concealed thermostat with control unit
for 4-outlets and integrated shut-off valve
flow rate: 58.03 l/min*

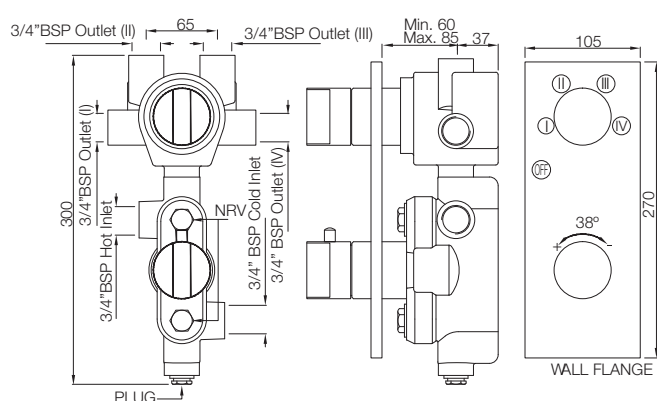


THK-687N

Thermatik-R concealed thermostat with control unit
for 5-outlets and integrated shut-off valve
flow rate: 56.74 l/min*

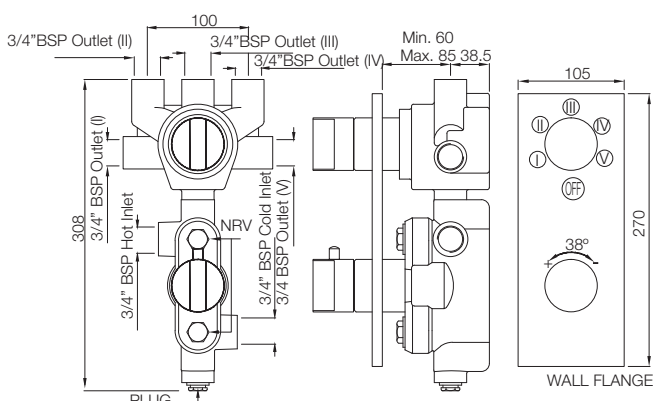


THK-691N

Thermatik-S concealed thermostat
bath & shower mixer
flow rate: 42.58 l/min*

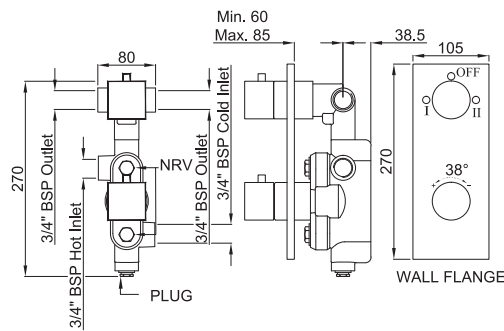


THK-693N

Thermatik-S concealed thermostat with control
unit for 3-outlets and integrated shut-off valve
flow rate: 51.80 l/min*

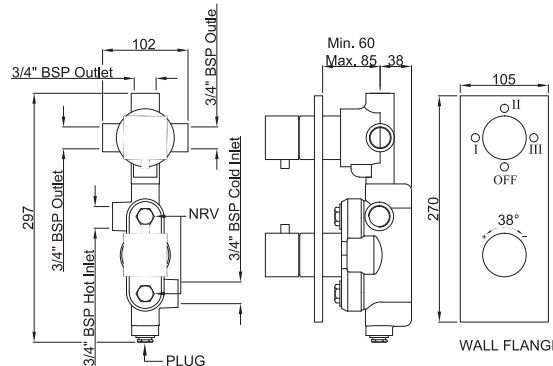

THK-695N

Thermatik-S concealed thermostat with control
unit for 4-outlets and integrated shut-off valve
flow rate: 58.03 l/min*

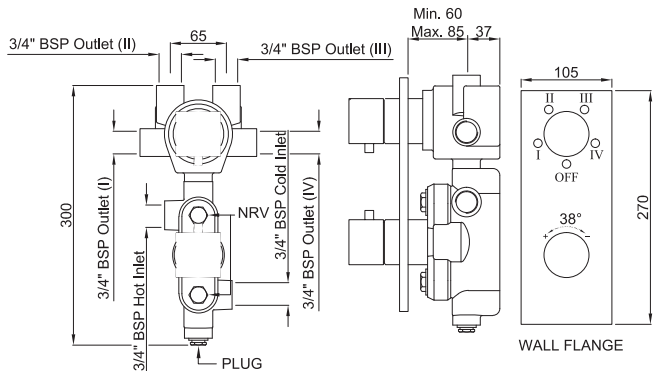

*at 3 bar pressure

THK-697N

Thermatik-S concealed thermostat with control
unit for 5-outlets and integrated shut-off valve
flow rate: 56.74 l/min*

