



Ambiente Porc. Esm. Trend Plus Marengo 60 x 60 cm

60 x 60 (2 cm)
24" x 24" (0.79")



PORCELÁNICO ESMALTADO / GLAZED PORCELAIN
GLASIERTES FEINSTEINZEUG / GRES CERÁME EMAILLÉ
PORCELLANATO SMALTATO



Plus
TREND

Características Técnicas - Technical Characteristics

60x60 (2 cm)



Resistencia mecánica
Mechanical strength
U11
EN 1339



Carga de rotura
Breaking load
>10.000 N
ISO 10545-4



Resistencia a la flexión
Bending strength
> 45 N/mm2
ISO 10545-4



Antideslizamiento péndulo
Anti-Slip pendulus
CS
EN 12633



Antideslizamiento rampa
Anti-Slip ramp
R11
DIN 51130




Coefficiente de fricción dinámica
Dynamic coefficient of friction (DCOF)
> 0,42
ANSI137.1 : 2012



P.E. Plus Trend Taupe

TG VAD9C-S

60 x 60 (2 cm)

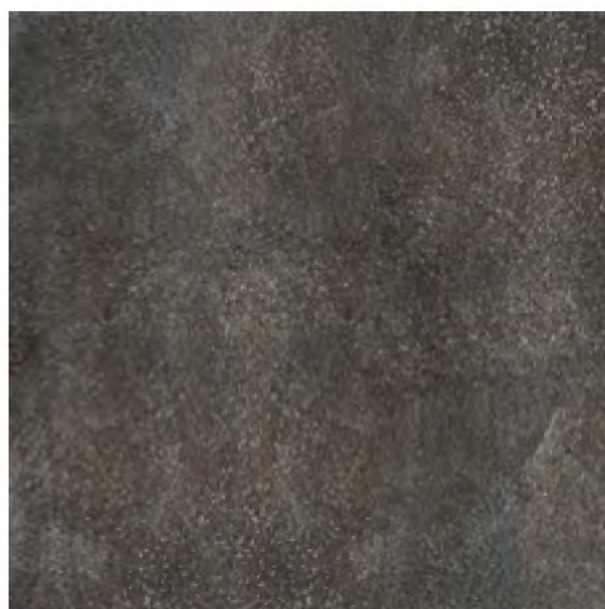

P.E. Plus Trend Marengo

TG VAD9C-S

60 x 60m (2 cm)

FORMATO Size	ESPESOR Thickness	Pzs/Caja	M2/Caja	Kg/Caja	M2/Pallet	Kg/Pallet
60x60	2 cm	2	1,44	33,83	21,60	1014,98



RODAPIÉ
SKIRTING



PORCELÁNICO ESMALTADO
GLAZED PORCELAIN TILE



TECNOLOGÍA DIGITAL
DIGITAL TECHNOLOGY



DIFERENTES GRÁFICAS
DIFFERENT PRINTINGS



MULTITONO
MULTITONE V3



MATE
MATT



ANTI-HIELO
FROST PROOF