




stonewave  
compact

# stonewave collection

*Una nuova tecnica rende unico ogni pezzo  
creando un effetto particolarmente naturale.  
Durevole, resistente agli urti, antigelivo e facilmente pulibile,  
si adatta a molteplici soluzioni spaziali di interni ed esterni.  
Per pareti e pavimenti.*

*A specially developed technique means that every tile is unique,  
creating a truly natural effect. The tile is extremely hard,  
totally wear-resistant, frost proof and very easy to clean.  
For walls and floor.*

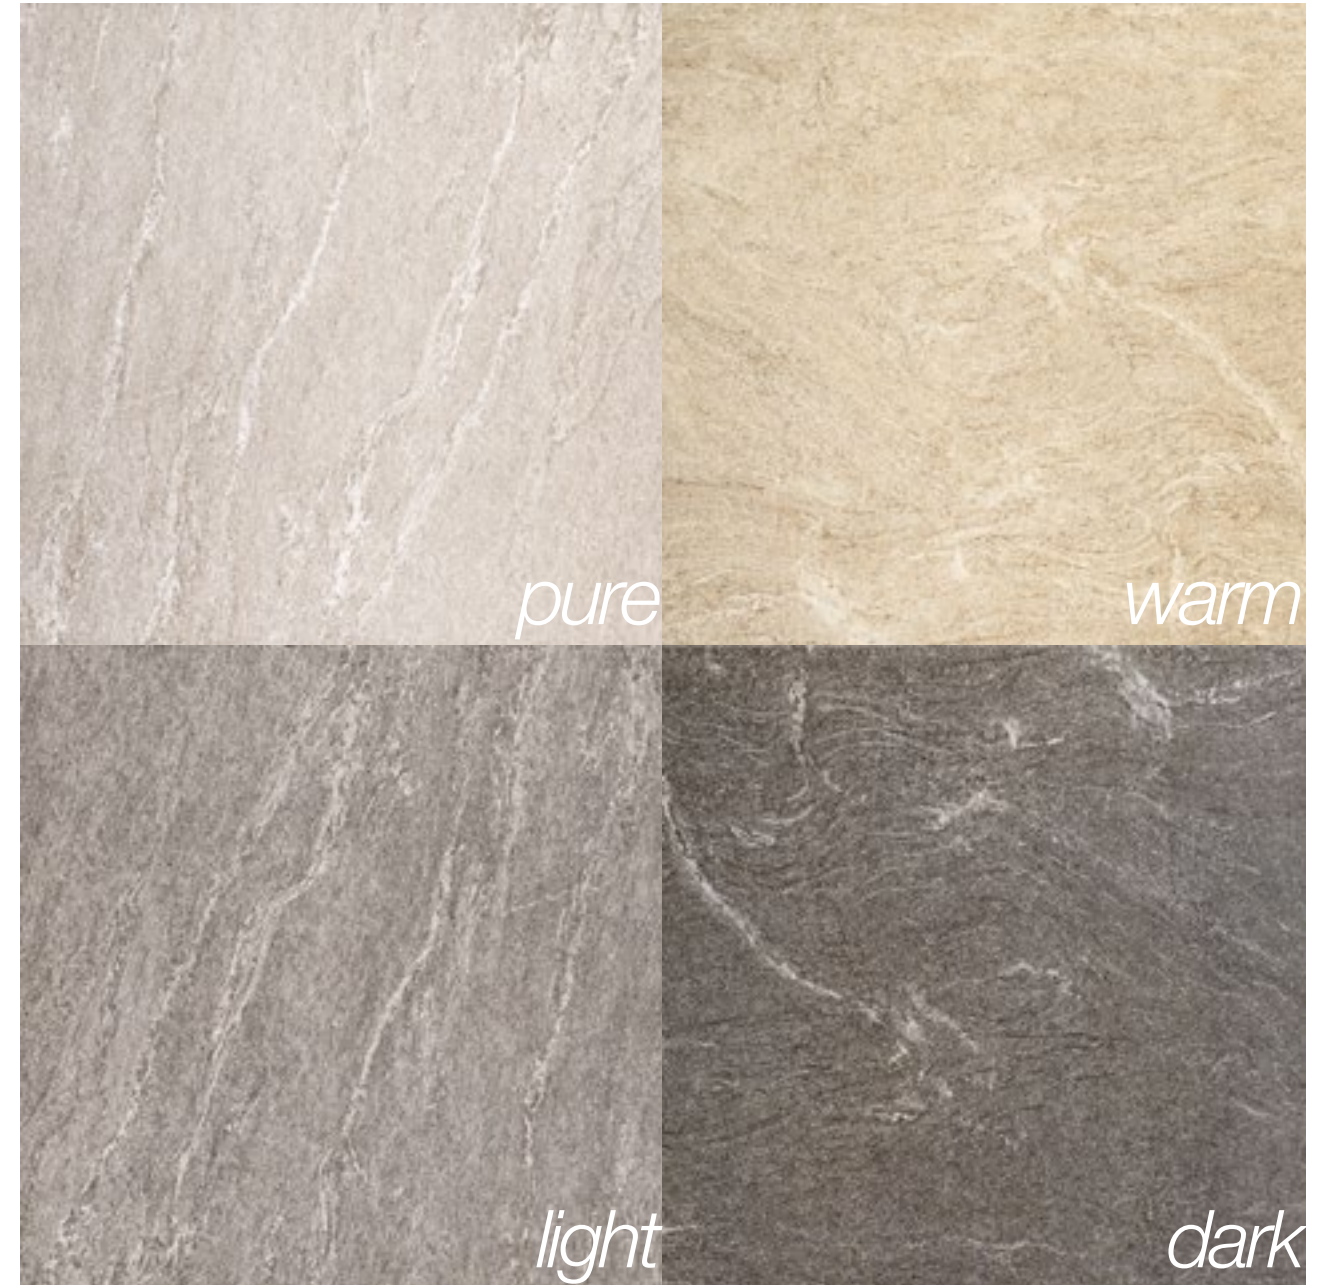



stonewave public

wall  
stonewave light  
44.1 x 88.4 18" x 36"

floor  
stonewave dark  
44.1 x 88.4 18" x 36"



stonewave dark + light  
44.1 x 88.4 + 75 x 75 18" x 36" + 30" x 30"

unicomstarker

stonewave collection



dark

*murales light*



stonewave light  
75 x 75 30° x 30°



stonewave warm  
75 x 75 30" x 30"

unicomstarker

stonewave collection




warm





*pure*

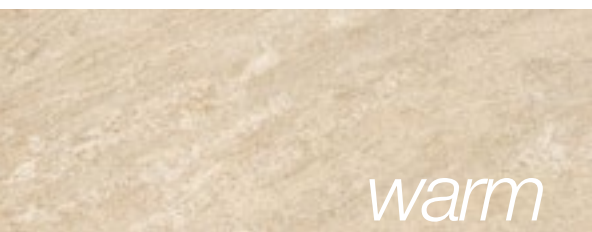


*warm*





*light*




*dark*

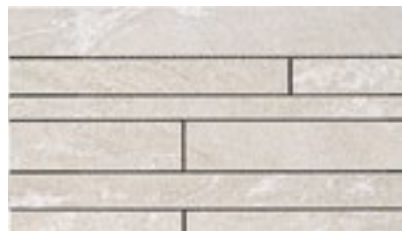

*murales*

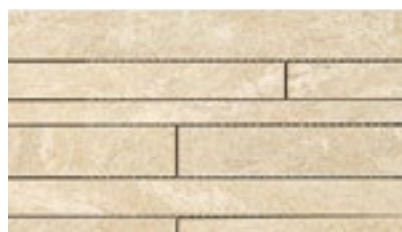

*mosaico*



*Le grandi lastre in cui si presenta il prodotto esaltano gli effetti tridimensionali della superficie e valorizzano la forza espressiva della materia.*

*The large size enhances the expressiveness of the material and stress the three-dimensional effects of the surface.*





stonewave residential

stonewave dark  
75 x 75 30" x 30"

*dark*



stone*wave* dark  
44.1 x 88.4 18" x 36"



stonewave pure  
30.1 x 60.5 12" x 24"

unicomstarker

stonewave collection



*pure*

*mosaico pure*





stone*wave* light  
44.1 x 88.4 - 18" x 36"

unicomstarker

stone*wave* collection



*light*



stone wave light  
44.1 x 88.4 18" x 36"

The image features a dark, monochromatic background with a highly textured, granular appearance, similar to stone or concrete. The texture is uneven, with various shades of dark gray and black, creating a sense of depth and roughness. In the lower right quadrant, the text "stonewave technicals" is displayed in a clean, white, sans-serif font. The word "stonewave" is in a lowercase, slightly italicized font, while "technicals" is in a standard lowercase font. The text is positioned against the darker, more uniform part of the background, ensuring high contrast and readability.

stonewave technicals

formati sizes formate formats

44.1 x 88.4 18" x 36"	75 x 75 30" x 30"	60.5 x 60.5 24" x 24"	30.1 x 60.5 12" x 24"	30.1 x 30.1 12" x 12"	30.1 x 30.1 12" x 12"	30.1 x 60.5 12" x 24"
57	65	54	51	48	140	36

pezzi speciali special items pièces especiales fornteile

gradino rettificato 30.1 x 60.5 12" x 24"	gradone costa retta rett. 30.1 x 60.5 12" x 24"	gradone angolare costa retta rett. 30.1 x 30.1 12" x 12"	elemento a L rettificato 30.1 x 60.5 12" x 24"	battiscopa smaltato rettificato 7.5 x 30.1 3" x 12"	7.5 x 60.5 3" x 24"	7 x 75 2 2/3" x 30"
33	115	118	49	8	15	24

soluzioni di posa laying solution propositions pour la pose verlegungsvorschläge

30 x 60 12" x 24" 45 x 90 18" x 36"	30 x 60 12" x 24" (3pz.) 45 x 90 18" x 36" (3pz.)	30 x 30 12" x 12" (3pz.) 30 x 60 12" x 24" (2pz.)	60 x 60 24" x 24" (2pz.) 30 x 60 12" x 24" (3pz.) 30 x 30 12" x 12" (1pz.)
100 % 100 %	100 % 100 %	42.86 % 57.14 %	53.33 % 40 % 6.66 %

caratteristiche tecniche technical features carateristiques techniques technische eigenschaften

	assorbimento d'acqua water absorption absorption d'eau wasseraufnahme	<0,5%		spessore thickness épaisseur dicke	30.1x30.1, 30.1x60.5 e 60.5x60.5 9.5 mm
	resistenza alla flessione breaking strength résistance a la flexion biegezugfestigkeit	35 N/mm <sup>2</sup>		spessore thickness épaisseur dicke	44.1x88.4 e 75x75 10 mm
	resistenza agli acidi resistance to acid résistance aux acides säurebeständigkeit	GLA		resistenza all'abrasione (PEI) resistance against abrasion (PEI) résistance à l'abrasion (PEI) tiefen-abriebbeständigkeit	IV
	resistenza al gelo frost resistance résistance au gel frostbeständigkeit	resiste frost proof aucune attération keine änderung		DIN51097 coefficiente d'attrito (scivolosità) DIN51130 static coefficient of friction DCOF coefficient de friction (glissement) Bot 3000 reibungskoeffizient (schlüpfrigkeit)	A+B+C R11 > 0.42
	resistenza alle macchie stain resistance résistance aux taches flackenbeständigkeit	4		variazioni cromatiche color shade variations variation de nuance nuance variations	V2 variazione leggera V2 slight variation V2 légère variation V2 leichte variation

imballi packing embalages verpackung

		spessore thickness	pezzi/sc pcs/box	mq/sc sqm/box	kg/sc kgs/box	sc/pl box/pal	mq/pl sqm/pal	kg/pl kgs/pal
30.1x30.1	rettificato	9.5	13	1.18	24.26	40	47.20	970.40
30.1x60.5	rettificato	9.5	7	1.27	26.13	40	50.80	1045.20
44.1x88.4	rettificato	10	3	1.17	23.90	36	42.12	860.40
60.5x60.5	rettificato	9.5	3	1.10	22.51	40	43.92	900.40
75x75	rettificato	10	2	1.13	25.32	45	50.62	1139.40
30.1x30.1	mosaico		11	0.99	19.70	54	53.46	1063.80
30.1x60.5	murales		5		18.25			
7.5x30.1	battiscopa smaltato rettificato		30		10.80			
7.5x60.5	battiscopa smaltato rettificato		10		7.90			
7x75	battiscopa smaltato rettificato		10		12.70			
30.1x60.5	gradino rettificato		8		29.84			
30.1x60.5	gradone costa retta rettificato		4		18.80			
30.1x30.1	gradone angolare c. retta rett.		2		5.60			
30.1x60.5	elemento a L rettificato		4		17.60			

il peso riportato è comprensivo del pallet di supporto  
the indicated weight includes the supporting pallet  
le poids indiqué est compris de la palette de support  
das angegebene gewicht versteht sich einschließlich der palette



informazionitecniche  
technical informations





unicomstarker®

via flumendosa 7  
41042 fiorano modenese  
modena italy  
T +39 (0536) 926011  
F italy +39 (0536) 926038  
F world +39 (0536) 926033  
F europe +39 (0536) 926023

[unicomstarker.com](http://unicomstarker.com)